



Specification

For

LCD Module

KD12232L



■PHYSICAL DATA

Item	Contents	Unit
LCD type	STN	--
LCD duty	1/32	--
LCD bias	1/5	--
Viewing direction	6	o'clock
Number of dots	122×32	Dots
Dot size(W×H)	0.36×0.41	Mm
Dot pitch(W×H)	0.40×0.45	mm

■ABSOLUTE MAXIMUM

Item	Symbol	Standard value	Unit
Power Supply Voltage	Vdd	0 ~ +5.0	V
Power supply for LCD Drive	Vlcd	- ~ 5	V
Input Voltage	Vin	-0.3 ~ Vdd+0.3	V
Operating Temperature	Top	-20 ~ +70	°C
Storage Temperature	Tstg	-30 ~ +80	°C

■MECHANICAL PARAMETERS

Item	Description	Unit
PCB Dimension	65.6 x 29.2 x0.7	mm
Outline Dimension	65.6 x 29.2 x6.0	mm
View Dimension	54.8 x 19.1	mm

■PIN ASSIGNMENT

Pin NO.	Symbol	Level	Function
1	VCC	+5V	Power supply
2	GND	0V	Power Ground
3	VLCD	--	For LCD drive voltage(variable)
4	RESET	H/L	Reset Signal
5	E1	H/L	U1 Enable Signal
6	E2	H/L	U2 Enable Signal
7	R/W	H/L	H: Read Signal, L: Write Signal
8	A0	H/L	H: Display Data, L:Display Instruction
9-16	DB0~DB7	H/L	Data bus
17	SLA		LED+
18	SLB		LED-




■ELECTRICAL CHARACTERISTICS

DC Characteristics(Ta=25 ;Vdd=5.0V±10%)

PARAMETER		SYMBOL	CONDITION	MIN	TYP	MAX	UNIT
Operating Voltage(1)		VDD		4.5	5.0	5.5	V
Input Voltage	High	Vih	E,R/W,RS,DB0~DB7 Terminals	0.7VDD	--	VCC	V
	Low	Vil		0	--	0.3VCC	
Operating Current		Idd	During Display	--	--	--	mA

AC characteristics (Vdd=5V ± 10%,Vss=0V Ta=25)

- MPU Bus Read/Write i (80-family MPU)

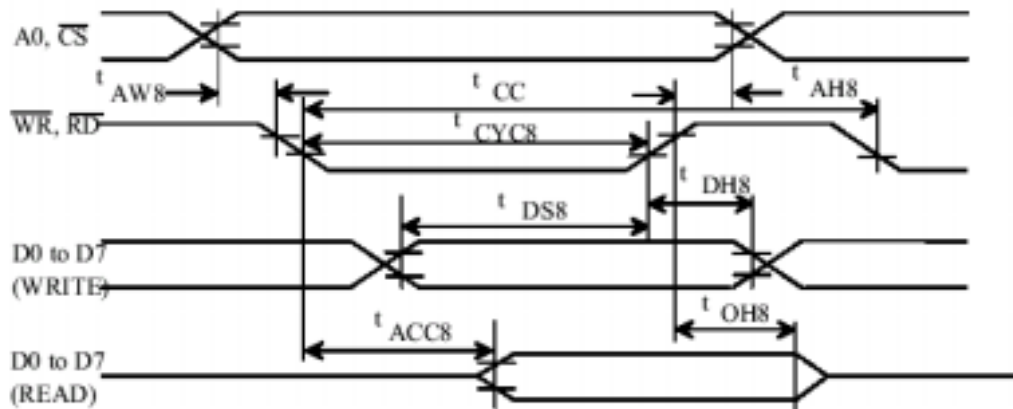


Ta= -20 to 75 deg. C, Vss= -1.0± 10% unless stated otherwise

Parameter	Symbol	Condition	Rating		Unit	Signal
			min	max		
Address hold time	tAH8		10	--	ns	A0, CS
Address setup time	tAW8		20	--	ns	
System cycle time	tCYC8		1,000	--	ns	WR, RD
Control pulsewidth	tcc		200	--	ns	
Data setup time	tDS8		80	--	ns	DO to D7
Data hold time	tDH8		10	--	ns	
RD access time	tACC8	CL= 100pF	--	90	ns	
Output disable time	tCH8		10	60	ns	

- Notes : 1. Increase parameter values by 200% when Vss= -3.0V.
2. All inputs must have a rise and fall time of less than 15 ns.



• MPU Bus Read/Write II (68-family MPU)

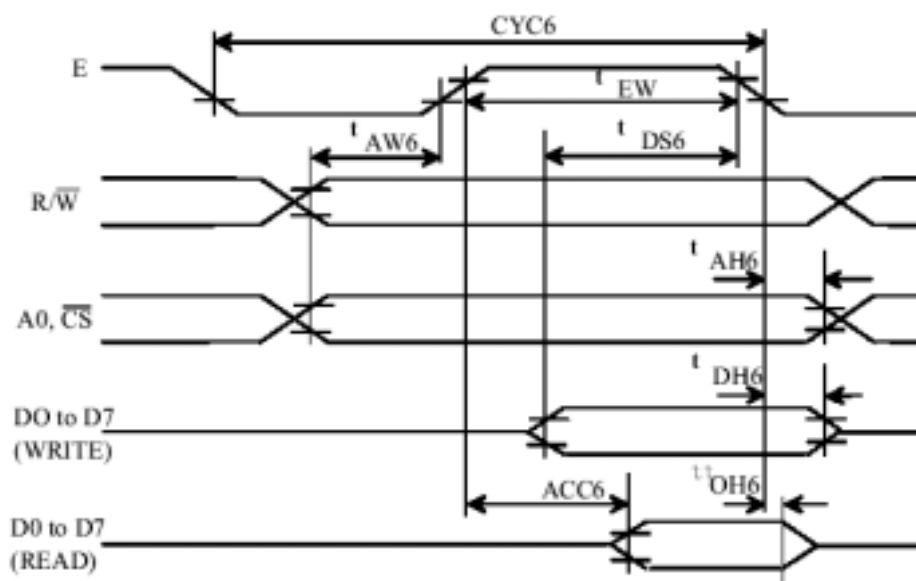

Ta = -20 to 75 deg. C. Vss = -5V ± 10 unless stated otherwise


Parameter		Symbol	Condition	Rating		Unit	Signal
				min	max		
System cycle time		tCYC6		1,000	—	ns	A0, $\overline{CS}$, R/W
Address setup time		tAW6		20	—	ns	
Address hold time		tAH6		10	—	ns	
Data setup time		tDS6		80	—	ns	D0 to D7
Data hold time		tDH6		10	—	ns	
Output disable time		tOH6		10	60	ns	
Access time		tACC6	CL = 100pF	—	90	ns	
Enable pulsewidth	Read	tEW		100	—	ns	E
	Write			8	—	ns	

Notes : 1. tCYC6 is the cycle time of $\overline{CS}$. E=H. not the cycle time of E.

2. Increase parameter values by 200% when Vss = -3.0V.


3. all inputs must have a rise and fall time of less than 15 ns.

• Display Control Signal Timing

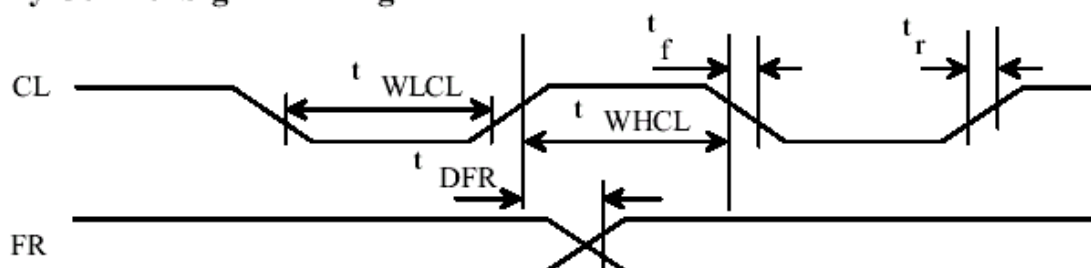




SYSTEM BLOCK DIAGRAM

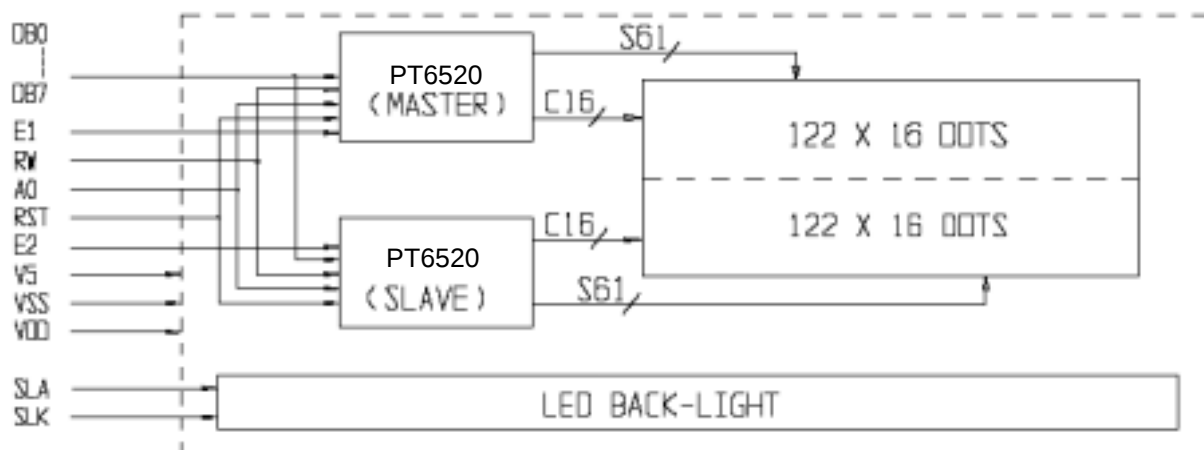

ASSEMBLY DIAGRAM

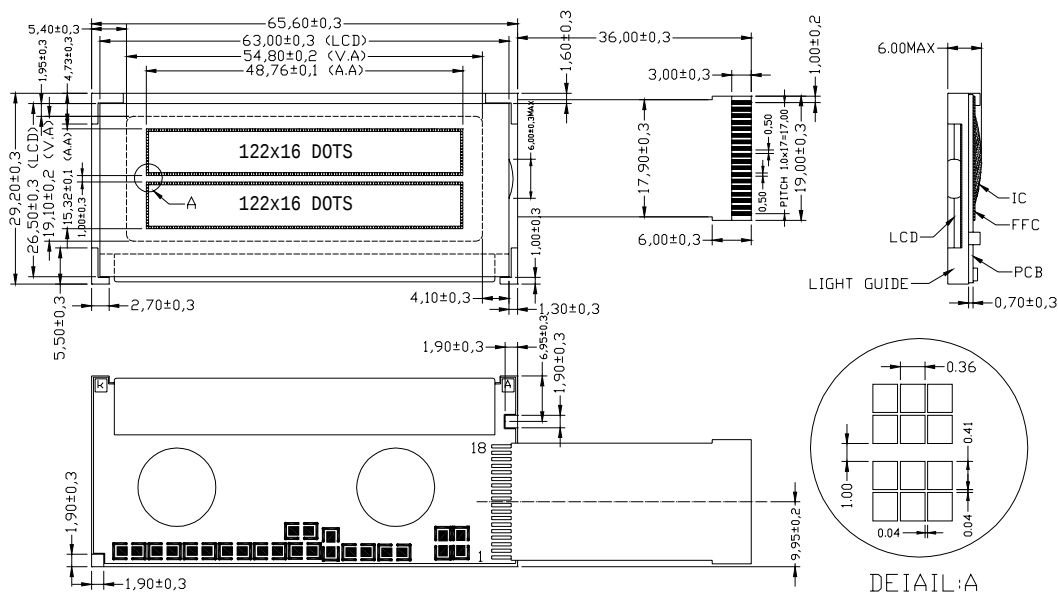

DISPLAY TYPE: STN/YELLOW & GREEN
DISPLAY MODE: REFLECTIVE
VIEWING DIRECTION: 6:00
DRIVING METHOD: 1/32 DUTY 1/5 BIAS
OPERATING VOLTAGE: 5.0V
OPERATING TEMPERATURE: 0°~50°C
STORAGE TEMPERATURE: -10°~60°C
CONNECTOR: HEAT SEAL

PIN	1	2	3	4	5	6	7	8	9
SYMBOL	VDD	GND	VLCD	RST	E1	E2	R/W	A0	DB0
PIN	10	11	12	13	14	15	16	17	18
SYMBOL	DB1	DB2	DB3	DB4	DB5	DB6	DB7	SLA	SLK