



**SPECIFICATION
FOR
LCD Module
KD050C-1A-02-TP**

MODULE:	KD050C-1A-02-TP
CUSTOMER:	

REV	DESCRIPTION	DATE
1.0	FIRST ISSUE	2016.01.18
STARTEK	INITIAL	DATE
PREPARED BY		
CHECKED BY		
APPROVED BY		

CUSTOMER	INITIAL	DATE
APPROVED BY		

Part. No	KD050C-1A-01-TP	REV	V1.0	Page 1 of 25
-----------------	------------------------	------------	-------------	---------------------

常备库存
Standing Stock

长期供货
Long Time supply

支持小量
NO MOQ

品种齐全
In Full Range



Revision History

[illegible]

Part. No	KD050C-1A-01-TP	REV	V1.0	Page 2 of 25
常 备 库 存 Standing Stock		长 期 供 货 Long Time supply		支 持 小 量 NO MOQ
				品 种 齐 全 In Full Range

Contents

General Description	4
1. Block Diagram	5
2. Outline dimension	6
3. Input Terminal Pin Assignment	7
4. LCD Optical Characteristics	9
5. Electrical Characteristics	12
6. TP Feature	13
7. AC Characteristic	15
8. LCD Module Out-Going Quality Level	17
9. Reliability Test Result	23
10. Cautions and Handling Precautions	24
11. Packing	25

Part. No	KD050C-1A-01-TP	REV	V1.0	Page 3 of 25
	常 备 库 存 Standing Stock	长 期 供 货 Long Time supply	支持小量 NO MOQ	品 种 齐 全 In Full Range

General Description

* Description

This is a color active matrix TFT (Thin Film Transistor) LCD (liquid crystal display) that uses amorphous silicon TFT as a switching device. This model is composed of a Transmissive type TFT-LCD Panel, driver circuit, back-light unit. The resolution of a 5.0TFT-LCD contains 800x480 pixels, and can display up to 65K/262K/16.7M colors.

* Features


- Low Input Voltage: 3.3V(TYP)
- Display Colors of TFT LCD: 65K/262K/16.7M colors
- Interface: 16/18/24 bit RGB

General Information Items	Specification	Unit	Note
	Main Panel		
Display area(AA)	108.00(H)*64.80 (V) (5.0inch)	mm	-
Driver element	TFT active matrix	-	-
Display colors	65K/262K/16.7M	colors	-
Number of pixels	800(RGB)*480	dots	-
Pixel arrangement	RGB vertical stripe	-	-
Pixel pitch	0.108(H)*0.108(V)	mm	-
Viewing angle	12:00	o'clock	-
Controller IC	ILI5960/ILI6122	-	-
Display mode	Transmissive/ Normally White	-	-
Operating temperature	-20~+70	℃	-
Storage temperature	-30~+80	℃	-

* Mechanical Information

Item		Min.	Typ.	Max.	Unit	Note
Module size	Horizontal(H)		120.70		mm	-
	Vertical(V)		75.80		mm	-
	Depth(D)		4.15		mm	-
Weight			TBD		g	-

1. Block Diagram

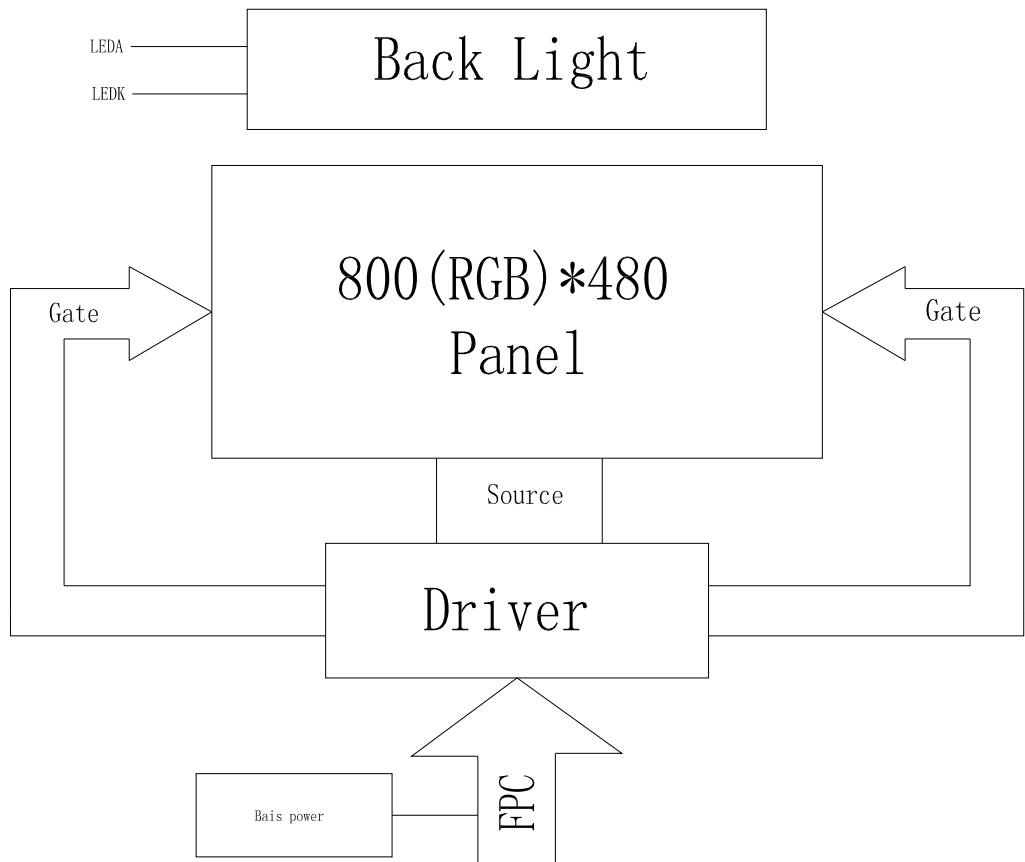

Part. No	KD050C-1A-01-TP	REV	V1.0	Page 5 of 25
常备库存 Standing Stock	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



Part. No	KD050C-1A-01-TP	REV	V1.0	Page 6 of 25	
常 备 库 存 Standing Stock		长 期 供 货 Long Time supply		支持小量 NO MOQ	品 种 齐 全 In Full Range

3. Input terminal Pin Assignment

NO.	SYMBOL	DISCRIPTION	I/O
1	VLED-	Cathode pin OF backlight	P
2	VLED+	Anode pin of backlight	P
3	GND	Ground.	P
4	VDD	Supply voltage(3.3V).	P
5	R0	Red data input.	I/O
6	R1	Red data input.	I/O
7	R2	Red data input.	I/O
8	R3	Red data input.	I/O
9	R4	Red data input.	I/O
10	R5	Red data input.	I/O
11	R6	Red data input.	I/O
12	R8	Red data input.	I/O
13	G0	Green data input.	I/O
14	G1	Green data input.	I/O
15	G2	Green data input.	I/O
16	G3	Green data input.	I/O
17	G4	Green data input.	I/O
18	G5	Green data input.	I/O
19	G6	Green data input.	I/O
20	G7	Green data input.	I/O
21	B0	Blue data input.	I/O
22	B1	Blue data input.	I/O
23	B2	Blue data input.	I/O
24	B3	Blue data input.	I/O
25	B4	Blue data input.	I/O

Part. No	KD050C-1A-01-TP	REV	V1.0	Page 7 of 25
----------	-----------------	-----	------	--------------

常备库存
Standing Stock

长期供货
Long Time supply

支持小量
NO MOQ

品种齐全
In Full Range



26	B5	Blue data input.	I/O
27	B6	Blue data input.	I/O
28	B7	Blue data input.	I/O
29	GND	Ground.	P
30	PCLK	Dot clock signal for RGB interface operation Fix this pin at VCI or GND when not in use.	I
31	DISP	Standby setting for testing, it should be connected to VDDIO in normal operation mode. If connected to GND, the IC is in standby mode.	I
32	HSYNC	Line synchronizing signal for RGB interface operation. fix this pin at VCI or GND when not in use	I
33	VSYNC	Frame synchronizing signal for RGB interface operation. fix this pin at VCI or GND when not in use.	I
34	DE	Data enable signal for RGB interface operation. fix this pin at VCI or GND when not in use.	I
35	NC	NC	
36	GND	Ground.	P
37	XR(NC)	Touch panel Right Glass Terminal	A/D
38	YD(NC)	Touch panel Bottom Film Terminal	A/D
39	XL(NC)	Touch panel LIFT Glass Terminal	A/D
40	YU(NC)	Touch panel Top Film Terminal	A/D

4. LCD Optical Characteristics

4.1 Optical specification

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Transmittance (with Polarizer)		T (%)	Θ=0 Normal viewing angle	—	4.29	—	—	
Transmittance (without Polarizer)		T(%)		—	12.16	—	—	
Contrast		CR		560	700	—		(1)(2)
Response time	Rising	T _R		—	4	8	msec	(1)(3)
	Falling	T _F		—	12	24		
Color gamut	S(%)			—	62	—	%	
Color chromaticity (CIE1931)	White	W _x		0.283	0.303	0.323		(1)(4) CF glass
		W _y		0.305	0.325	0.345		
	Red	R _x		0.606	0.626	0.646		
		R _y		0.314	0.334	0.354		
	Green	G _x		0.257	0.277	0.297		
		G _y		0.529	0.549	0.569		
	Blue	B _x		0.122	0.142	0.162		
		B _y		0.102	0.122	0.142		
Viewing angle	Hor.	Θ _L	CR>10	60	70	—		(1)(4) Viewing Angle base on using EWV Polarizer , Reference Only
		Θ _R		60	70	—		
	Ver.	Θ _U		60	70	—		
		Θ _D		40	60	—		
Optima View Direction		12 O'clock						(5)

4.2 Measuring Condition


- Measuring surrounding : dark room
- Ambient temperature : 25±2°C
- 15min. warm-up time.

Part. No	KD050C-1A-01-TP	REV	V1.0	Page 9 of 25	
常备库存 Standing Stock		长期供货 Long Time supply		支持小量 NO MOQ	品种齐全 In Full Range

4.3 Measuring Equipment

- FPM520 of Westar Display technologies, INC., which utilized SR-3 for Chromaticity and BM-5A for other optical characteristics.

Note (1) Definition of Viewing Angle:

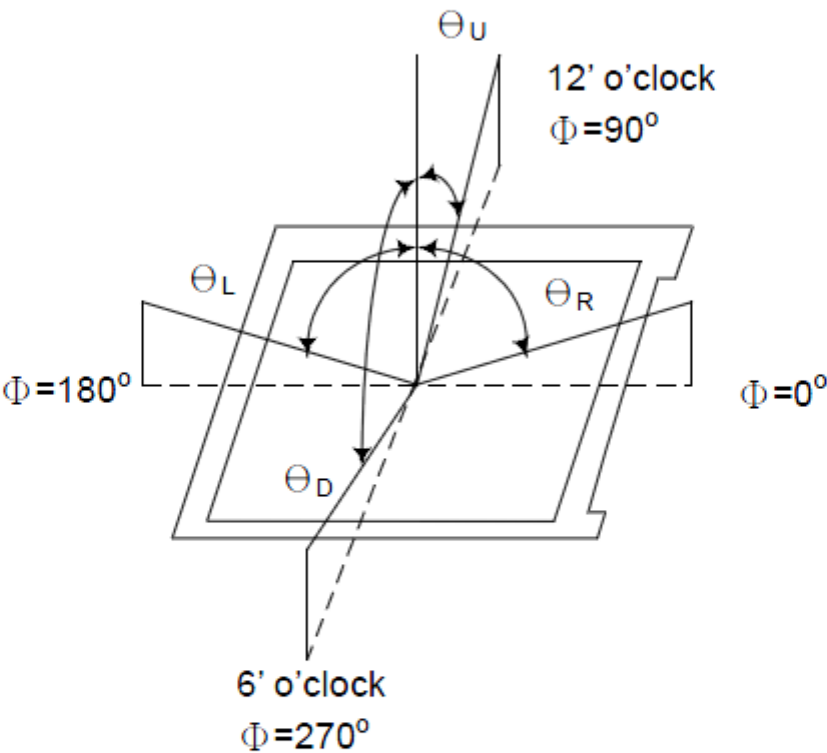


Note (2) Definition of Contrast Ratio (CR) :
measured at the center point of panel

$$CR = \frac{\text{Luminance with all pixels white}}{\text{Luminance with all pixels black}}$$


Part. No	KD050C-1A-01-TP	REV	V1.0	Page 10 of 25
常备库存 Standing Stock	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



Note (3) Definition of Response Time : Sum of T_R and T_F

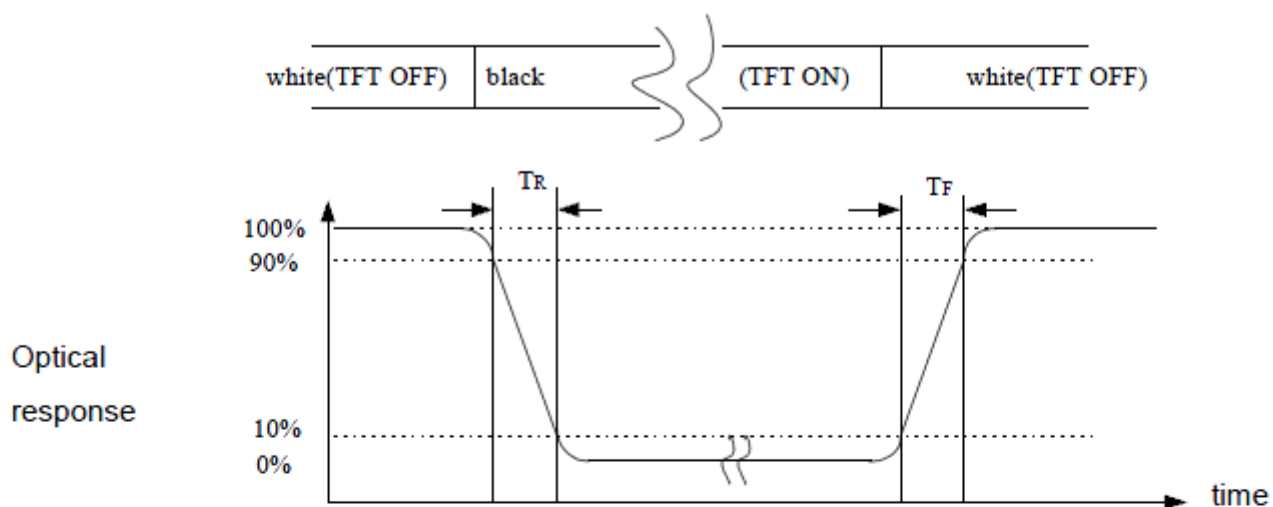

Note (4) Definition of optical measurement setup

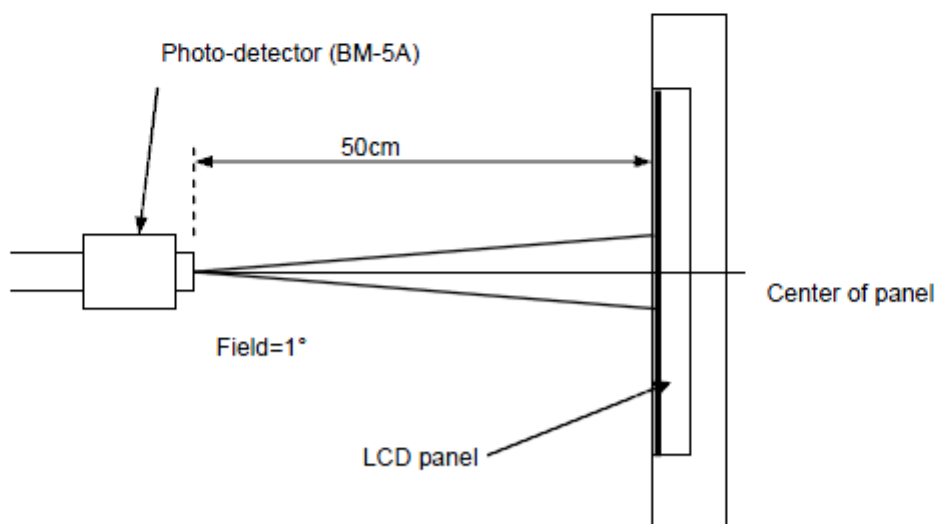

Part. No	KD050C-1A-01-TP	REV	V1.0	Page 11 of 25
常备库存 Standing Stock	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

5. Electrical Characteristics

5.1 Absolute Maximum Rating (Ta=25 VSS=0V)

Characteristics	Symbol	Min.	Max.	Unit
Digital Supply Voltage	VDD	-0.5	5.0	V
Digital interface supply Voltage	VDDIO	-0.5	VDD+0.3	V
Operating temperature	T _{OP}	-20	+70	°C
Storage temperature	T _{ST}	-30	+80	°C

5.2 DC Electrical Characteristics

Characteristics	Symbol	Min.	Typ.	Max.	Unit	Note
Digital Supply Voltage	VDD	3.0	3.3	4.2	V	
Digital interface supply Voltage	VDDIO	3.0	3.3	4.2	V	
Normal mode Current consumption	IDD	--	200	--	mA	
Level input voltage	VIH	0.7VDDIO		VDDIO	V	
	VIL	GND		0.3VDDIO	V	
Level output voltage	VOH	0.8VDDIO		VDDIO	V	
	VOL	GND		0.2VDDIO	V	


5.3 LED Backlight Characteristics

The back-light system is edge-lighting type with 12chips White LED

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Forward Current	I _F	30	40	--	mA	
Forward Voltage	V _F	--	25.6	--	V	
LCM Luminance	L _V	680	--	--	cd/m ²	IF=40mA
Uniformity	AVg	80	--	--	%	

Note (1) LED life time (Hr) can be defined as the time in which it continues to operate under the condition: Ta=25±3 °C, typical IL value indicated in the above table until the brightness becomes less than 50%.

Note (2) The "LED life time" is defined as the module brightness decrease to 50% original brightness at Ta=25°C and IL=40mA. The LED lifetime could be decreased if operating IL is larger than 40mA. The constant current driving method is suggested.

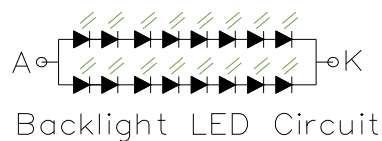

Part. No	KD050C-1A-01-TP	REV	V1.0	Page 12 of 25
----------	-----------------	-----	------	---------------

常备库存
Standing Stock

长期供货
Long Time supply

支持小量
NO MOQ

品种齐全
In Full Range



6. TP Feature

6.1 Conditions of use and storage

Item	Value(condition)	Note
Temperature range upon operation	Humidity: 20 %~90 % non dew, condensation -20℃~70℃	In a simple substance
Temperature range upon storage	Humidity: 20 %~90 % non dew, condensation -30℃~80℃	In a simple substance

6.2 Electrical property

Item	Value	Note
Maximum voltage	DC5V	
Resistance between terminals	X direction[Film side]:200-600Ω	
	Y direction [Glass side]:300-900Ω	
Insulation resistance	DC 25V 20MΩor above	Connect X + ~X- and Y+ ~Y-, apply 25VDC Between X and Y for perform measurements
Chattering	10 msec or below	
Rating	Voltage is DC 5V	

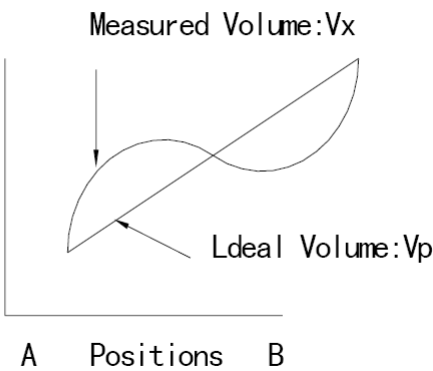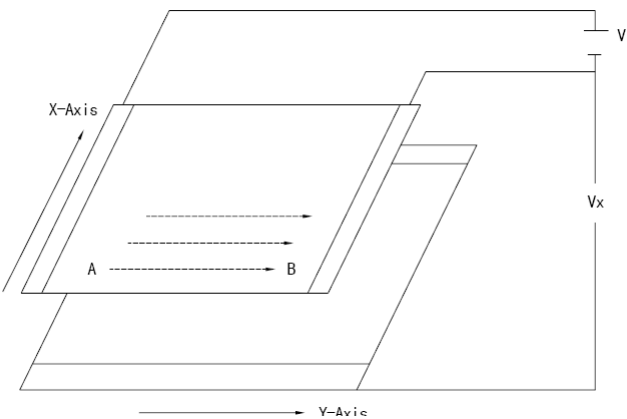

Part. No	KD050C-1A-01-TP	REV	V1.0	Page 13 of 25
常备库存 Standing Stock		长期供货 Long Time supply		支持小量 NO MOQ
				品种齐全 In Full Range

6.3 Mechanical property

Item	Performance		Note
Input method	Used of an exclusive pen or finger		
Load upon operation	Exclusive pen	60-100g or below	Operation and measurement with a pen must be carried out under the following tip conditions: Stylus pen material : POM(ployacetal) . Tip : Diameter 3.0mm, SR 0.8 mm
	Finger	60-100g or below	Operations and measurement methods simulated for a finger must be carried out under the following tip conditions. Material :Silicon rubber (Hardness : 30°Hs) Tip : Diameter 12.0 mm, SR 12.5mm
Surface hardness	Pencil hardness : 3H or above		It complies with the way of test method JIS K5400.


6.4 Optical property

Item	Performance	Note
Total light transmittance	80% or above	JIS K7105
Haze	5% or below	JIS K7136
Film specification	Polished type with hard coated surface	




7. AC Characteristic

7.1. Display Timing characteristics

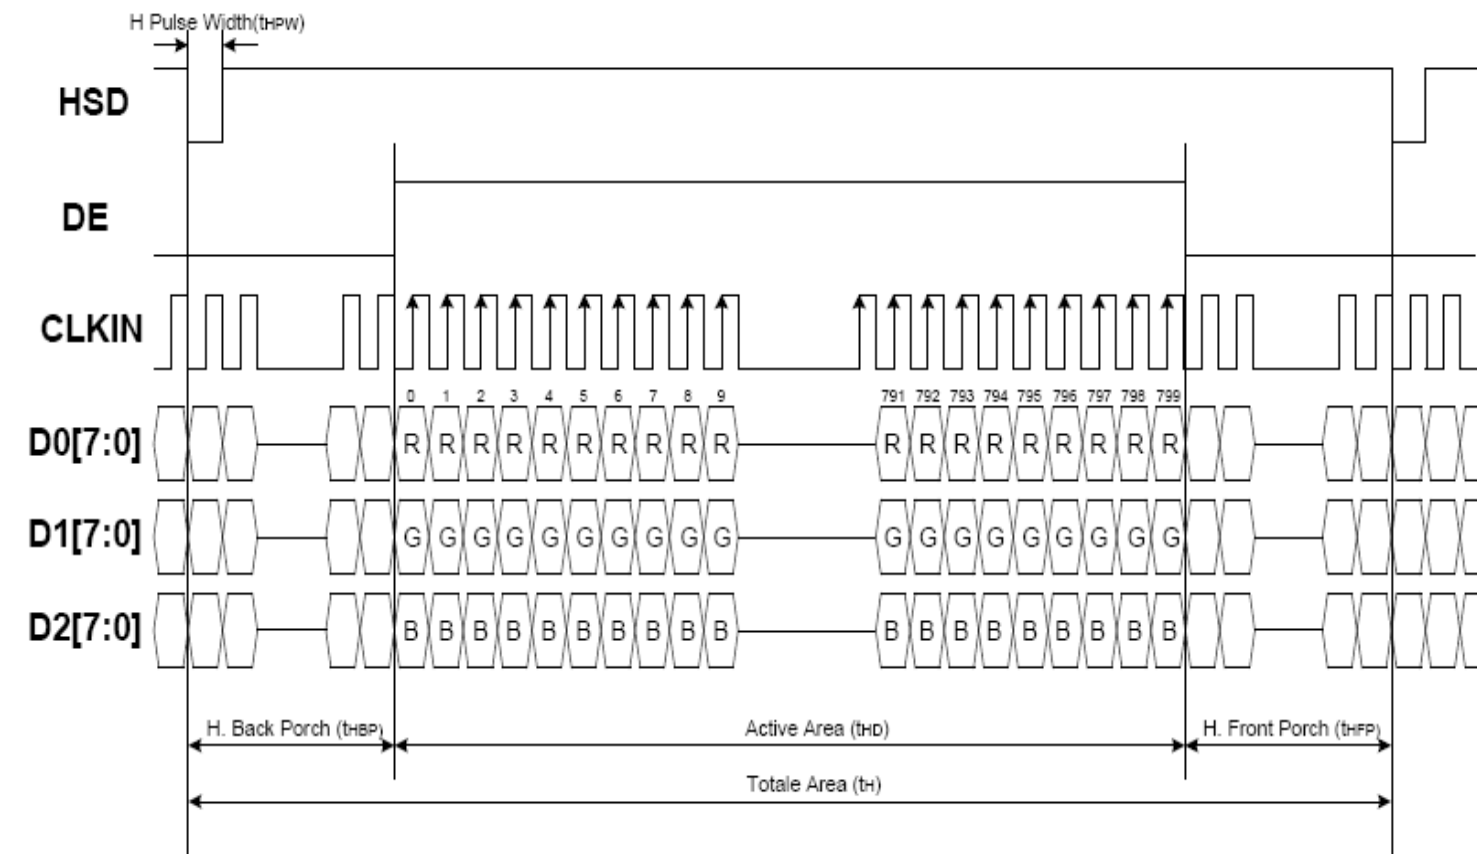

Horizontal Input Timing						
Parameter		Symbol	Value			Unit
			Min.	Typ.	Max.	
Horizontal display area		t _{HD}	--	800	--	CLKIN
CLKIN frequency		f _{CLK}	--	33.3	50	MHz
1 Horizontal line period		t _H	862	1056	1200	CLKIN
HSD pulse width	Min.	t _{HPW}	--	1	--	CLKIN
	Typ.		--	--	CLKIN	
	Max.		--	40	--	CLKIN
HSD back porch	SYNC	t _{HBP}	46	46	46	CLKIN
HSD front porch	SYNC	t _{HFP}	16	210	354	CLKIN

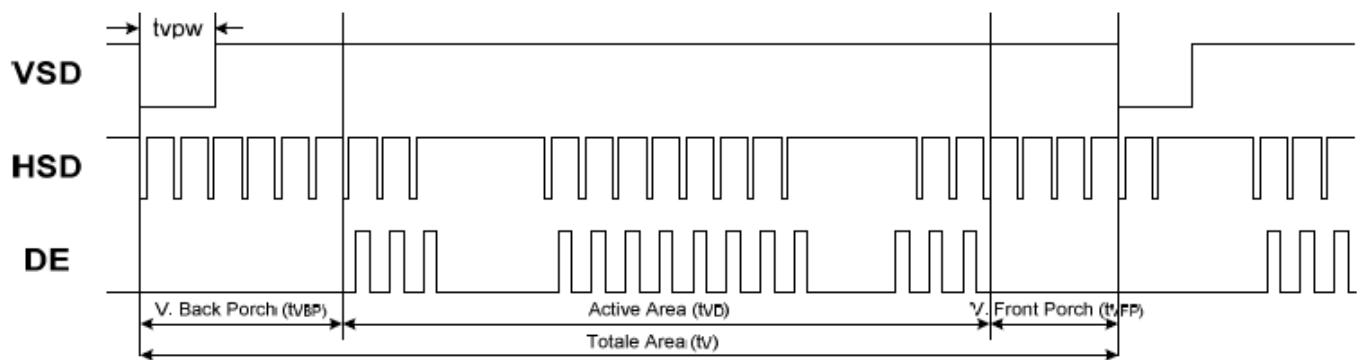

Vertical Input Timing					
Parameter	Symbol	Value			Unit
		Min.	Typ.	Max.	
Vertical display area	t_{vD}	--	480	--	HSD
VSD period time	t_v	510	525	650	HSD
VSD pulse width	t_{vpw}	1	--	20	HSD
VSD back porch	t_{vBP}	23	23	23	HSD
VSD front porch	t_{vFP}	7	22	147	HSD


8. LCD Module Out-Going Quality Level

8.1 VISUAL & FUNCTION INSPECTION STANDARD


8.1.1 Inspection conditions

Inspection performed under the following conditions is recommended.

- Temperature : 25±5℃
- Humidity : 65%±10%RH
- Viewing Angle : Normal viewing Angle.
- Illumination: Single fluorescent lamp (300 to 700Lux)
- Viewing distance:30-50cm

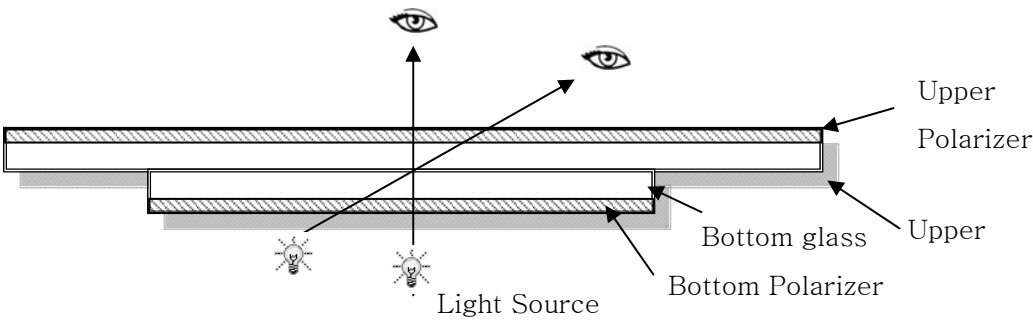

8.1.2 Definition

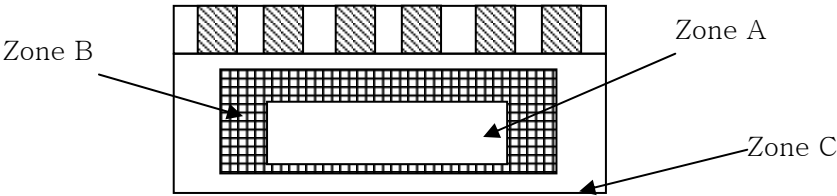

- Zone A : Effective Viewing Area(Character or Digit can be seen)
 - Zone B : Viewing Area except Zone A
 - Zone C : Outside (Zone A+Zone B) which can not be seen after assembly by customer .)
- Note:
- As a general rule ,visual defects in Zone C can be ignored when it doesn't effect product function or appearance after assembly by customer.

8.1.3 Sampling Plan

According to GB/T 2828-2003 ; , normal inspection, Class II

AQL:

Major defect	Minor defect
--------------	--------------

Part. No	KD050C-1A-01-TP	REV	V1.0	Page 17 of 25
常备库存 Standing Stock	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	


0.65

1.5

LCD: Liquid Crystal Display , TP: Touch Panel , LCM: Liquid Crystal Module

No	Items to be inspected	Criteria	Classification of defects
1	Functional defects	1) No display, Open or miss line 2) Display abnormally, Short 3) Backlight no lighting, abnormal lighting. 4) TP no function	Major
2	Missing	Missing component	
3	Outline dimension	Overall outline dimension beyond the drawing is not allowed	
4	Color tone	Color unevenness, refer to limited sample	Minor
5	Soldering appearance	Good soldering , Peeling off is not allowed.	
6	LCD/Polarizer/TP	Black/White spot/line, scratch, crack, etc.	

8.1.4 Criteria (Visual)

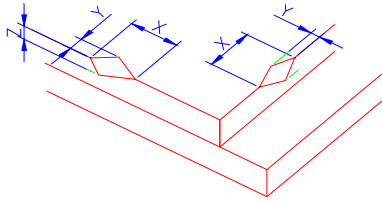Number	Items	Criteria(mm)						
1.0 LCD Crack/Broken	(1) The edge of LCD broken	 <table border="1"> <tr> <td>X</td><td>Y</td><td>Z</td></tr> <tr> <td>≤3.0mm</td><td><Inner border line of the seal</td><td>≤T</td></tr> </table>	X	Y	Z	≤3.0mm	<Inner border line of the seal	≤T
X	Y	Z						
≤3.0mm	<Inner border line of the seal	≤T						
NOTE: X: Length Y: Width								

Part. No

KD050C-1A-01-TP

REV

V1.0

Page 18 of 25



常备库存
Standing Stock

长期供货
Long Time supply


支持小量
NO MOQ

品种齐全
In Full Range

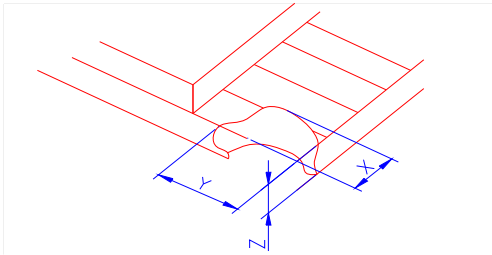

Z: Height L: Length of ITO, T: Height of LCD	(2)LCD corner broken	 <table><tr><td>X</td><td>Y</td><td>Z</td></tr><tr><td>≤3.0mm</td><td>≤L</td><td>≤T</td></tr></table>	X	Y	Z	≤3.0mm	≤L	≤T
	X	Y	Z					
≤3.0mm	≤L	≤T						
(3) LCD crack	 Crack Not allowed							



Number	Items	Criteria (mm)																				
2.0	Spot defect  X Φ=(X+Y)/2	① light dot (LCD/TP/Polarizer black/white spot , light dot, pinhole, dent, stain)																				
		<table><tr><th rowspan="2">Zone Size (mm)</th><th colspan="3">Acceptable Qty</th></tr><tr><th>A</th><th>B</th><th>C</th></tr><tr><td>Φ≤0.10</td><td colspan="2">Ignore</td><td rowspan="4">Ignore</td></tr><tr><td>0.15<Φ≤0.2</td><td colspan="2">3(distance ≥ 10mm)</td></tr><tr><td>0.25<Φ≤0.35</td><td colspan="2">2</td></tr><tr><td>0.4<Φ</td><td colspan="2">0</td></tr></table>	Zone Size (mm)	Acceptable Qty			A	B	C	Φ≤0.10	Ignore		Ignore	0.15<Φ≤0.2	3(distance ≥ 10mm)		0.25<Φ≤0.35	2		0.4<Φ	0	
		Zone Size (mm)		Acceptable Qty																		
			A	B	C																	
		Φ≤0.10	Ignore		Ignore																	
		0.15<Φ≤0.2	3(distance ≥ 10mm)																			
		0.25<Φ≤0.35	2																			
		0.4<Φ	0																			
		②Dim spot (LCD/TP/Polarizer dim dot, light leakage、dark spot)																				
		<table><tr><th rowspan="2">Zone Size (mm)</th><th colspan="3">Acceptable Qty</th></tr><tr><th>A</th><th>B</th><th>C</th></tr><tr><td>Φ≤0.1</td><td colspan="2">Ignore</td><td rowspan="4">Ignore</td></tr><tr><td>0.1<Φ≤0.25</td><td colspan="2">3(distance ≥ 10mm)</td></tr><tr><td>0.25<Φ≤0.35</td><td colspan="2">2</td></tr><tr><td>Φ > 0.4</td><td colspan="2">0</td></tr></table>	Zone Size (mm)	Acceptable Qty			A	B	C	Φ≤0.1	Ignore		Ignore	0.1<Φ≤0.25	3(distance ≥ 10mm)		0.25<Φ≤0.35	2		Φ > 0.4	0	
		Zone Size (mm)		Acceptable Qty																		
			A	B	C																	
		Φ≤0.1	Ignore		Ignore																	
		0.1<Φ≤0.25	3(distance ≥ 10mm)																			
		0.25<Φ≤0.35	2																			
		Φ > 0.4	0																			
		③ Polarizer accidented spot																				
		<table><tr><th rowspan="2">Zone Size (mm)</th><th colspan="3">Acceptable Qty</th></tr><tr><th>A</th><th>B</th><th>C</th></tr><tr><td>Φ≤0.2</td><td colspan="2">Ignore</td><td rowspan="3">Ignore</td></tr><tr><td>0.2<Φ≤0.5</td><td colspan="2">2(distance ≥ 10mm)</td></tr><tr><td>Φ>0.5</td><td colspan="2">0</td></tr></table>	Zone Size (mm)	Acceptable Qty			A	B	C	Φ≤0.2	Ignore		Ignore	0.2<Φ≤0.5	2(distance ≥ 10mm)		Φ>0.5	0				
		Zone Size (mm)		Acceptable Qty																		
			A	B	C																	
Φ≤0.2	Ignore		Ignore																			
0.2<Φ≤0.5	2(distance ≥ 10mm)																					
Φ>0.5	0																					

Part. No	KD050C-1A-01-TP	REV	V1.0	Page 20 of 25
----------	-----------------	-----	------	---------------

常备库存
Standing Stock

长期供货
Long Time supply

支持小量
NO MOQ

品种齐全
In Full Range



	Line defect (LCD/TP /Polarizer black/white line, scratch, stain)	<table><tr><th rowspan="2">Width(mm)</th><th rowspan="2">Length(mm)</th><th colspan="3">Acceptable Qty</th></tr><tr><th>A</th><th>B</th><th>C</th></tr><tr><td>$\Phi \leq 0.03$</td><td>Ignore</td><td colspan="2">Ignore</td><td rowspan="3">Ignore</td></tr><tr><td>$0.03 < W \leq 0.05$</td><td>$L \leq 3.0$</td><td colspan="2">$N \leq 2$</td></tr><tr><td>$0.05 < W \leq 0.08$</td><td>$L \leq 2.0$</td><td colspan="2">$N \leq 2$</td></tr><tr><td>$0.08 < W$</td><td colspan="4">Define as spot defect</td></tr></table>					Width(mm)	Length(mm)	Acceptable Qty			A	B	C	$\Phi \leq 0.03$	Ignore	Ignore		Ignore	$0.03 < W \leq 0.05$	$L \leq 3.0$	$N \leq 2$		$0.05 < W \leq 0.08$	$L \leq 2.0$	$N \leq 2$		$0.08 < W$	Define as spot defect			
Width(mm)	Length(mm)	Acceptable Qty																														
		A	B	C																												
$\Phi \leq 0.03$	Ignore	Ignore		Ignore																												
$0.03 < W \leq 0.05$	$L \leq 3.0$	$N \leq 2$																														
$0.05 < W \leq 0.08$	$L \leq 2.0$	$N \leq 2$																														
$0.08 < W$	Define as spot defect																															
3.0	SMT	According to IPC-A-610C class II standard . Function defect and missing part are major defect ,the others are minor defect.																														
		TP bubble/ accidented spot	<table><tr><th rowspan="2">Size Φ(mm)</th><th colspan="3">Acceptable Qty</th></tr><tr><th>A</th><th>B</th><th>C</th></tr><tr><td>$\Phi \leq 0.1$</td><td colspan="2">Ignore</td><td rowspan="4">Ignore</td></tr><tr><td>$0.2 < \Phi \leq 0.25$</td><td colspan="2">3 (distance $\geq 10\text{mm}$)</td></tr><tr><td>$0.25 < \Phi \leq 0.35$</td><td colspan="2">2</td></tr><tr><td>$0.4 < \Phi$</td><td colspan="2">0</td></tr></table>	Size Φ (mm)	Acceptable Qty			A	B	C	$\Phi \leq 0.1$	Ignore		Ignore	$0.2 < \Phi \leq 0.25$	3 (distance $\geq 10\text{mm}$)		$0.25 < \Phi \leq 0.35$	2		$0.4 < \Phi$	0										
Size Φ (mm)	Acceptable Qty																															
	A	B	C																													
$\Phi \leq 0.1$	Ignore		Ignore																													
$0.2 < \Phi \leq 0.25$	3 (distance $\geq 10\text{mm}$)																															
$0.25 < \Phi \leq 0.35$	2																															
$0.4 < \Phi$	0																															
		Assembly deflection	beyond the edge of backlight $\leq 0.15\text{mm}$																													



Part. No	KD050C-1A-01-TP	REV	V1.0	Page 21 of 25
----------	-----------------	-----	------	---------------

常备库存
Standing Stock

长期供货
Long Time supply

支持小量
NO MOQ

品种齐全
In Full Range

4.0	TP Related	Newton Ring	Newton Ring area>1/3 TP area NG			 1 规律性				
			Newton Ring area≤1/3 TP area OK				 2 非规律性			
					 似牛顿环					
		TP corner broken X : length Y : width Z : height	<table><tr><td>X</td><td>Y</td><td>Z</td></tr><tr><td>X≤3.0mm</td><td>Y≤3.0mm</td><td>Z<LCD thicknes</td></tr></table> * Circuitry broken is not allowed.	X	Y	Z	X≤3.0mm	Y≤3.0mm	Z<LCD thicknes	X
X	Y	Z								
X≤3.0mm	Y≤3.0mm	Z<LCD thicknes								
TP edge broken X : length Y : width Z : height	<table><tr><td>X</td><td>Y</td><td>Z</td></tr><tr><td>X≤6.0mm</td><td>Y≤2.0mm</td><td>Z<LCD thicknes</td></tr></table> * Circuitry broken is not allowed.	X	Y	Z	X≤6.0mm	Y≤2.0mm	Z<LCD thicknes			
X	Y	Z								
X≤6.0mm	Y≤2.0mm	Z<LCD thicknes								

Criteria (functional items)

Number	Items	Criteria (mm)
1	No display	Not allowed
2	Missing segment	Not allowed
3	Short	Not allowed
4	Backlight no lighting	Not allowed
5	TP no function	Not allowed

Part. No	KD050C-1A-01-TP	REV	V1.0	Page 22 of 25
----------	-----------------	-----	------	---------------

常备库存
Standing Stock

长期供货
Long Time supply

支持小量
NO MOQ

品种齐全
In Full Range

9. Reliability Test Result

9.1 Condition

Item	Condition	Sample Size	Test Result	Note
Low Temperature Operating Life test	-20℃, 96HR	3ea	pass	-
Thermal Humidity Operating Life test	70℃90%RH, 96HR	3ea	pass	-
Temperature Cycle ON/OFF test	-20℃ ↔ 70℃, ON/OFF, 20CYC	3ea	pass	(1)
High Temperature Storage test	80℃, 96HR	3ea	pass	-
Low Temperature Storage test	- 30℃, 96HR	3ea	pass	-
ESD test	150pF, 330Ω , ±6KV(Contact)/± 8KV(Air), 5 points/panel, 10 times/point	3ea	pass	
Thermal Shock Resistance	The sample should be allowed to stand the following 5 cycles of operation: TSTL for 30 minutes -> normal temperature for 5 minutes -> TSTH for 30 minutes -> normal temperature for 5 minutes, as one cycle, then taking it out and drying it at normal temperature, and allowing it stand for 24 hours	3ea	pass	
Box Drop Test	1 Corner 3 Edges 6 faces, 66cm(MEDIUM BOX)	1box	pass	-

Note (1) ON Time over 10 seconds, OFF Time under 10 seconds

10. Cautions and Handling Precautions

10.1 Handling and Operating the Module

(1) When the module is assembled, it should be attached to the system firmly.

Do not warp or twist the module during assembly work.

(2) Protect the module from physical shock or any force. In addition to damage, this may cause improper operation or damage to the module and back-light unit.

(3) Note that polarizer is very fragile and could be easily damaged. Do not press or scratch the surface.

(4) Do not allow drops of water or chemicals to remain on the display surface.

If you have the droplets for a long time, staining and discoloration may occur.

(5) If the surface of the polarizer is dirty, clean it using some absorbent cotton or soft cloth.

(6) The desirable cleaners are water, IPA (Isopropyl Alcohol) or Hexane.

Do not use ketene type materials (ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.

(7) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contact with hands, legs, or clothes, it must be washed away thoroughly with soap.

(8) Protect the module from static; it may cause damage to the CMOS ICs.

(9) Use finger-stalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.

(10) Do not disassemble the module.

(11) Protection film for polarizer on the module shall be slowly peeled off just before use so that the electrostatic charge can be minimized.

(12) Pins of I/F connector shall not be touched directly with bare hands.

(13) Do not connect, disconnect the module in the "Power ON" condition.

(14) Power supply should always be turned on/off by the item 6.1 Power On Sequence & 6.2 Power Off Sequence

10.2 Storage and Transportation.

(1) Do not leave the panel in high temperature, and high humidity for a long time.

It is highly recommended to store the module with temperature from 0 to 35 °C and relative humidity of less than 70%

(2) Do not store the TFT-LCD module in direct sunlight.

(3) The module shall be stored in a dark place. When storing the modules for a long time, be sure to adopt effective measures for protecting the modules from strong ultraviolet radiation, sunlight, or fluorescent light.

(4) It is recommended that the modules should be stored under a condition where no condensation is allowed. Formation of dewdrops may cause an abnormal operation or a failure of the module.

In particular, the greatest possible care should be taken to prevent any module from being operated where condensation has occurred inside.

(5) This panel has its circuitry FPC on the bottom side and should be handled carefully in order not to be stressed.

Part. No	KD050C-1A-01-TP	REV	V1.0	Page 24 of 25
常备库存 Standing Stock	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



11.Packing

----TBD-----

Part. No	KD050C-1A-01-TP	REV	V1.0	Page 25 of 25
	常 备 库 存 Standing Stock	长 期 供 货 Long Time supply	支持小量 NO MOQ	品 种 齐 全 In Full Range