




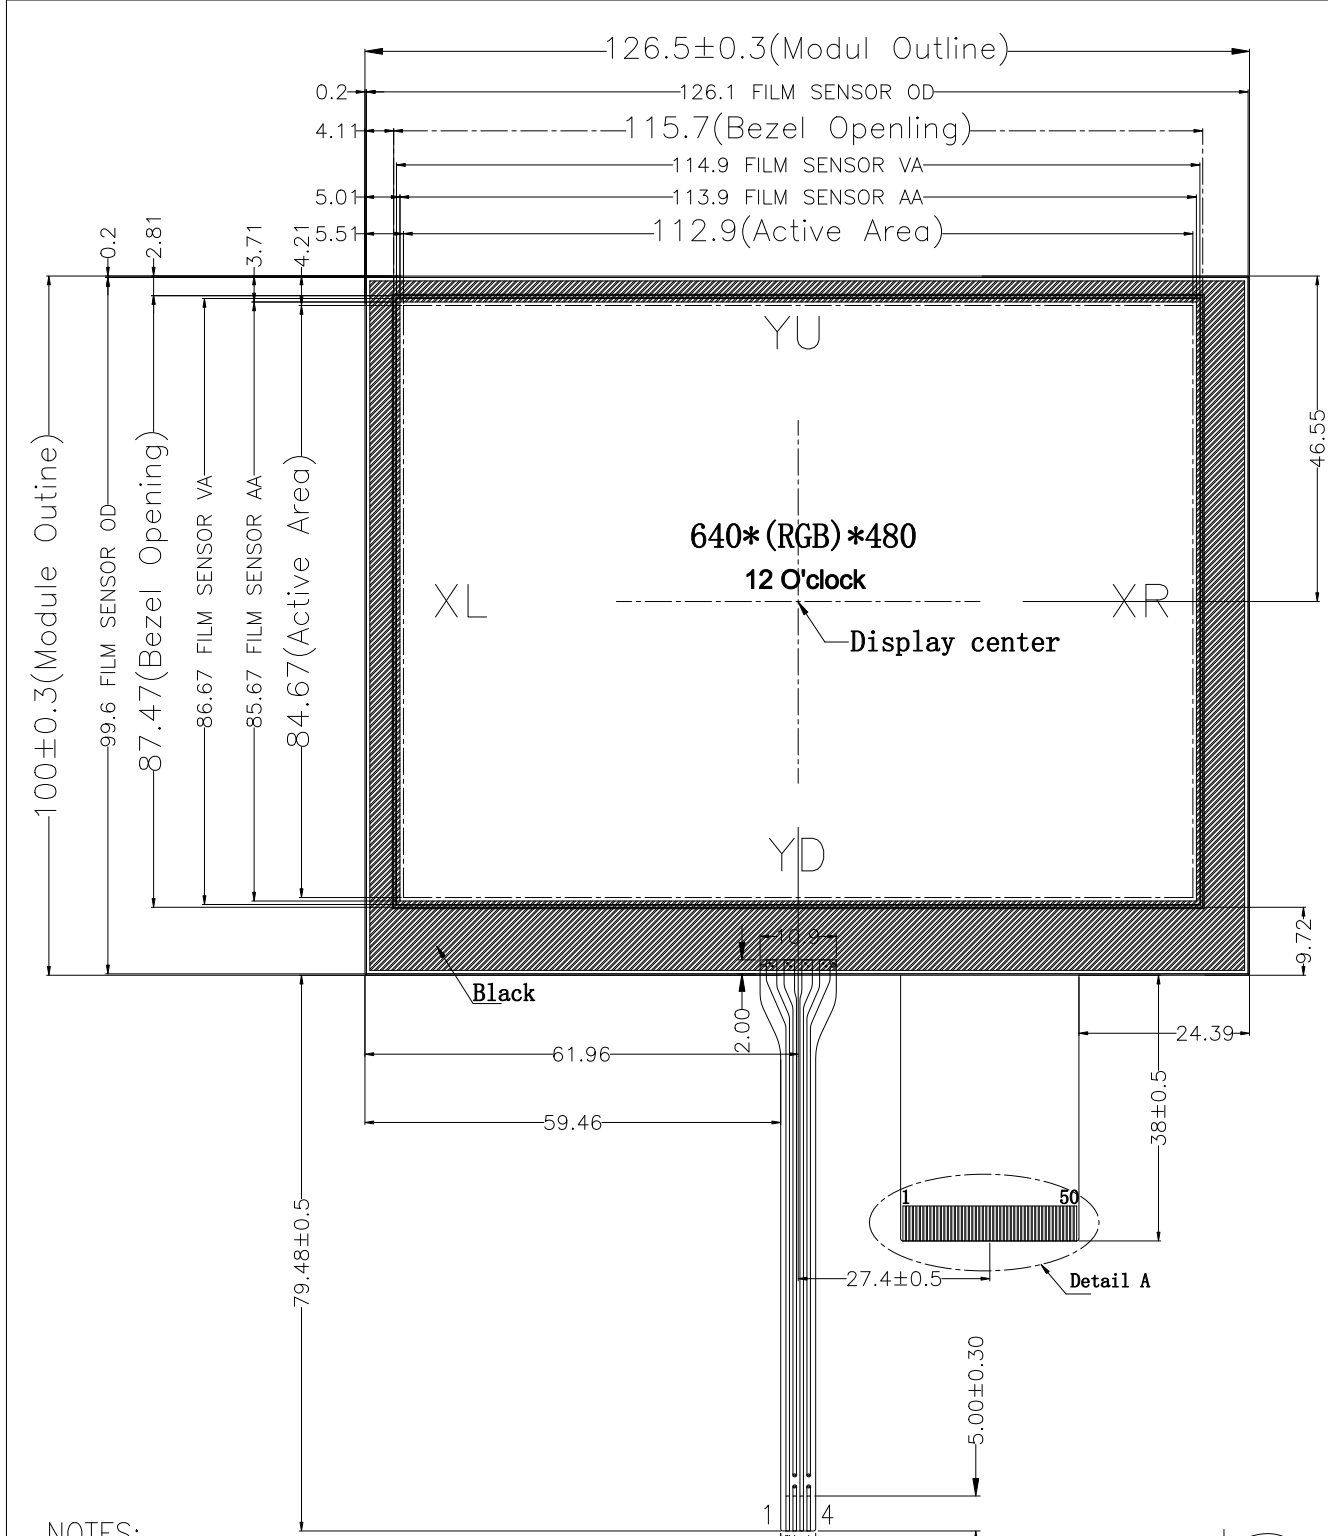



- NOTES:
1. DISPLAY TYPE: 5.6" TFT inch(Diagonal)
 2. DISPLAY MODE: Normally White, Transmissive
 3. VIEWING DIRECTION: 12 O'clock
 4. DRIVER IC:
 5. VCI: 2.8-3.3V
 6. OPERATING TEMP: -20°C TO 70°C
STORAGE TEMP: -30°C TO 80°C
 7. BACK LIGHT: LED WHITE, 15 LED, 100mA, 9.3V±0.3V
 8. RoHS COMPLIANT.
 9. RTP: ITO Film+ITO Glass+FPC, Light transmittance 78%(+/-3%)



Detail A
Scale(1:1)

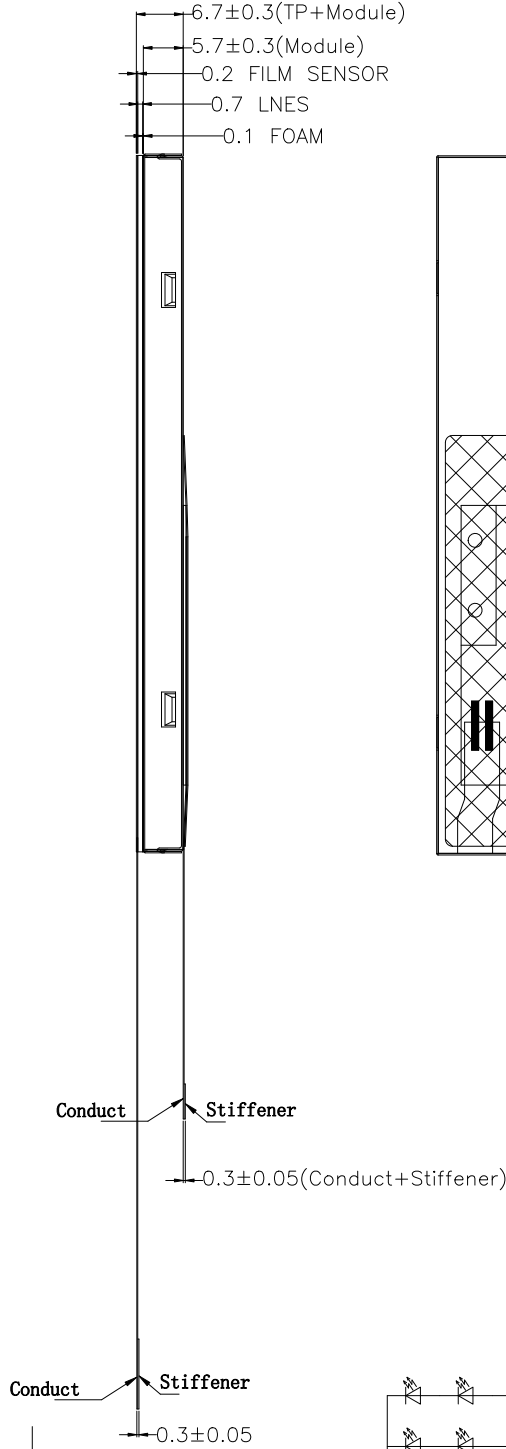

LED(B/L) CIRCUIT

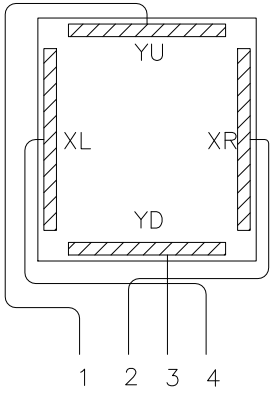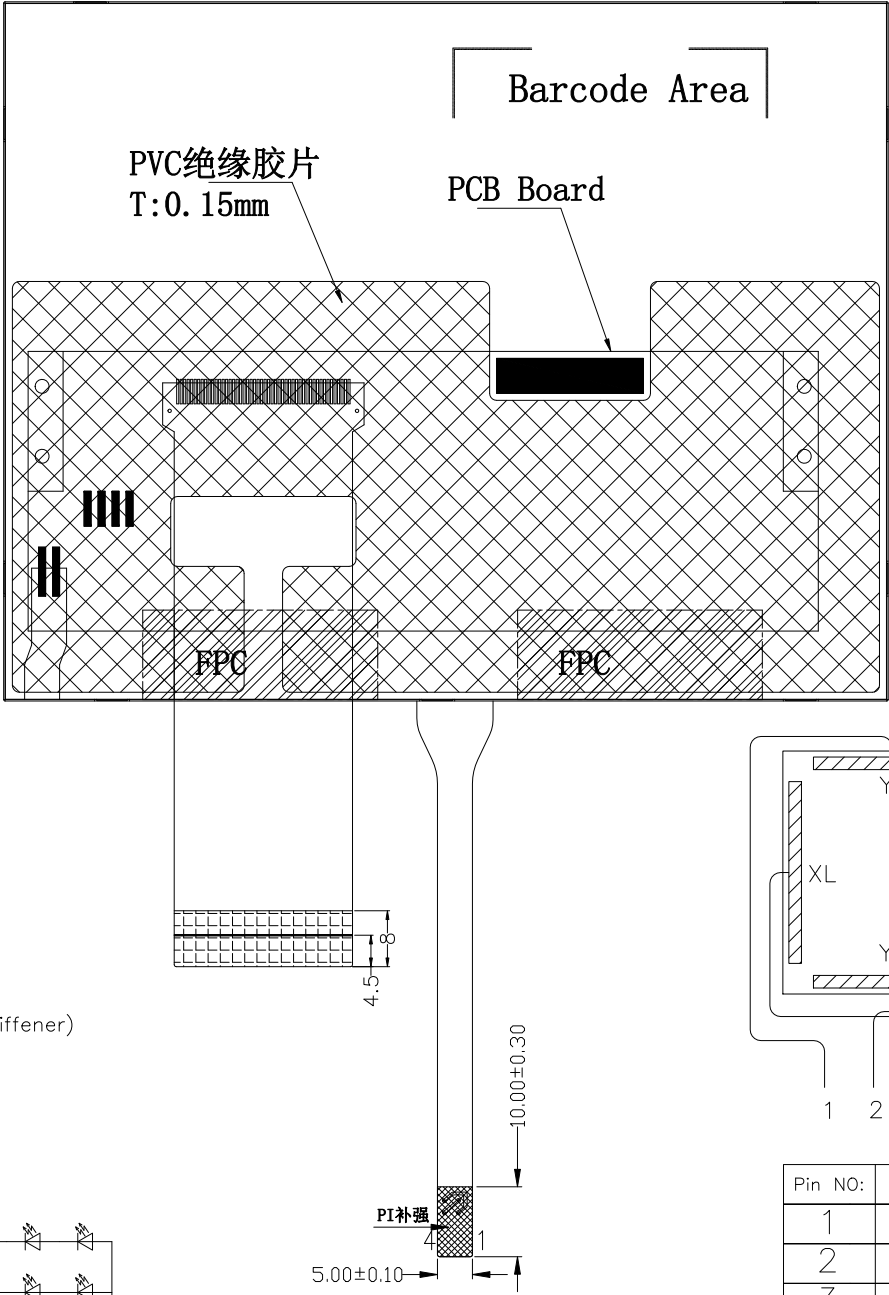

逻辑图

Pin NO:	Assignment
1	YU
2	XR
3	YD
4	XL

NO.	Pin Name
1	VLED+
2	VLED+
3	VLED-
4	VLED-
5	GND
6	VCOM
7	VCC
8	MODE
9	DE
10	VS
11	HS
12	B7
13	B6
14	B5
15	B4
16	B3
17	B2
18	B1
19	B0
20	G7
21	G6
22	G5
23	G4
24	G3
25	G2
26	G1
27	G0
28	R7
29	R6
30	R5
31	R4
32	R3
33	R2
34	R1
35	R0
36	GND
37	DCLK
38	GND
39	L/R
40	U/D
41	VGH
42	VHL
43	AVDD
44	RESET
45	POL
46	VCOM
47	NC
48	NC
49	NC
50	NC

深圳市柯达科电子科技有限公司
SHENZHEN STARTEK ELECTRONICS CO.,LTD

Rev	Revision content description	Date	TOLERANCE (公差)	DRAWING NAME	Part No.	Unit
V0	first	2017/1/6	TOLERANCE UNLESS OTHERWISE SPECIFIED X.X±0.3 X.XX±0.2	Part No.		mm
			Scale 1:1	Drawn		
				Checked		
				Approve		Page 1/1