



SPECIFICATIONS FOR LCM+HDMI Module

MODULE No:	KD043WQTPA035-01_HDMI
CUSTOMER:	

STARTEK	INITIAL	DATE
PREPARED BY		
CHECKED BY		
APPROVED BY		

CUSTOMER	INITIAL	DATE
APPROVED BY		



Revision History

[illegible]

Part. No	KD043WQTPA035-01_HDMI	REV	V1.0	Page 2 of 33
常 备 库 存 Stock For Sale	长 期 供 货 Long Time supply	支持小量 NO MOQ	品 种 齐 全 In Full Range	



Contents

1. Scope.....	4
1.1 Basic Description.....	4
1.2 Mechanical Information.....	5
1.3 Recommended Resolution.....	5
1.4 Plug & Play.....	5
1.5 Power Supply Rating.....	5
1.6 Block Diagram.....	6
1.7 Outline Dimension.....	7
2. Input Terminal Pin Assignment.....	8
3. Operating Instructions:.....	12
4. LCD Optical Characteristics.....	13
4.1 Optical specification.....	13
4.2 Measuring Condition.....	13
5. Electrical Characteristics:.....	16
5.1 Absolute Maximum Rating.....	16
5.2 DC Electrical Characteristics.....	16
5.3 LED Backlight Characteristics.....	17
6. TFT AC Characteristic.....	19
6.1 Input signal characteristics.....	19
6.2 AC Timing Diagram.....	20
6.2.1 Clock and Data Input Timing Diagram.....	20
6.2.2 SYNC Mode.....	20
6.3 3-Wire Communication Timing Diagram.....	21
6.4 RGB Input Timing Table.....	21
6.4.1 Parallel 24-bit RGB Timing Table.....	21
6.4.2 Series 8-bit RGB Timing Table.....	22
6.5 SYNC Mode Timing Diagram.....	23
6.6 SYNC-DE Mode Timing Diagram.....	24
7. LCD Module Out-Going Quality Level.....	25
7.1 VISUAL & FUNCTION INSPECTION STANDARD.....	25
7.1.1 Inspection conditions.....	25
7.1.2 Definition.....	25
7.1.3 Sampling Plan.....	26
7.1.4 Criteria (Visual).....	27
8. Reliability Test Results.....	32
9. Cautions and Handling Precautions.....	33
9.1 Handling and Operating the Module.....	33
9.2 Storage and Transportation.....	33
10. Packing.....	34
----TBD-----	34

Part. No	KD043WQTPA035-01_HDMI	REV	V1.0	Page 3 of 33
常 备 库 存 Stock For Sale	长 期 供 货 Long Time supply	支持小量 NO MOQ	品 种 齐 全 In Full Range	



1. Scope

This is a color active matrix TFT (Thin Film Transistor) LCD (liquid crystal display) that uses amorphous silicon TFT as a switching device. This model is composed of a Transmissive type TFT-LCD Panel, driver circuit, HDMI board and back-light unit. The resolution of a 4.3" TFT-LCD contains 480X272 pixels, and can display up to 65K/262K/16.7M colors.

1.1 Basic Description

General Information	Items	Specifications	Unit	Note
		Main Panel		
	Display area(AA)	95.04(H) *53.86(V) (4.3 inch)	mm	
	Driver element	TFT active matrix	-	
	Display colors	65K/262K/16.7M	colors	
	Number of pixels	480(RGB)*272	dots	
	TFT Pixel arrangement	RGB vertical stripe	-	
	Pixel pitch	0.198 (H) x 0.198 (V)	mm	
	Viewing angle	12:00	o'clock	
	TFT Controller IC	ST7282	-	
	Operating temperature	-20~+70	℃	
	Storage temperature	-30~+80	℃	
	LCM Luminance	480 nits (Typ.)		
	Video Input	HDMI		
	HDMI it Firmware Version	KD043WQTPA035-01_HDMI_V01		

Part. No	KD043WQTPA035-01_HDMI	REV	V1.0	Page 4 of 33
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



1.2 Mechanical Information

Item		Min.	Typ.	Max.	Unit	Note
Module size	Horizontal(H)	-	105.4	-	mm	
	Vertical(V)	-	67.15	-	mm	
	Depth(D)	-	2.86	-	mm	
Weight		-	TBD	-	g	

1.3 Recommended Resolution

Recommended Resolution	480(RGB)*272 @55~60 Hz
------------------------	------------------------

1.4 Plug & Play

DDC2B /VESA Standard


1.5 Power Supply Rating

Power Consumption	2.7W Watt (Typ.)
MICRO USB DC POWER	5V 2A(Typ.)

Part. No	KD043WQTPA035-01_HDMI	REV	V1.0	Page 5 of 33
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	




1.6 Block Diagram

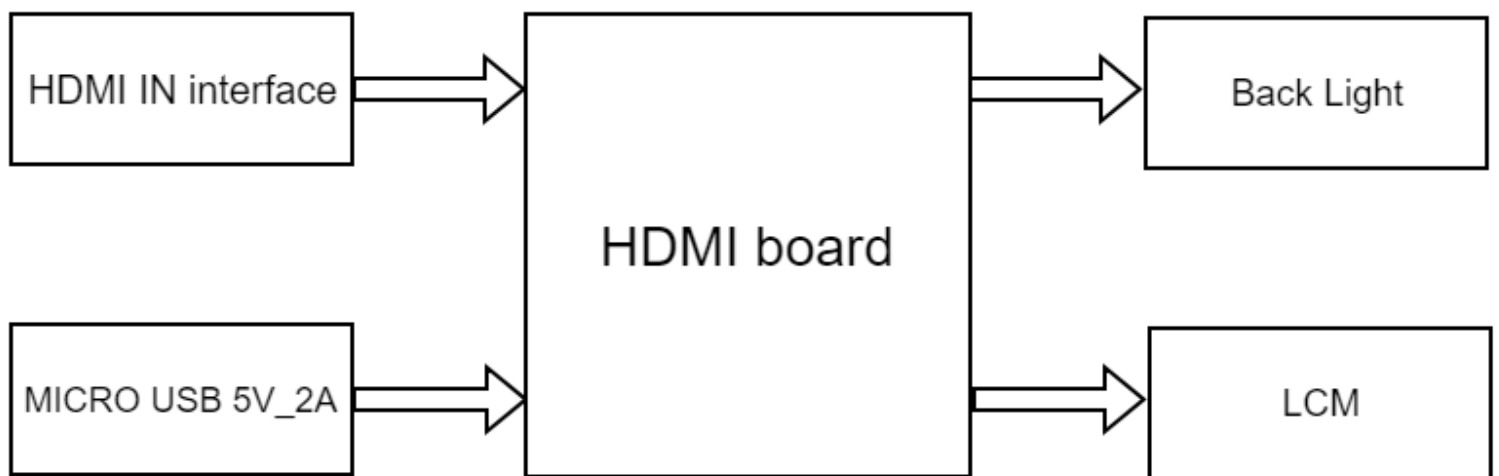

Part. No	KD043WQTPA035-01_HDMI	REV	V1.0	Page 6 of 33
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



1.7 Outline Dimension

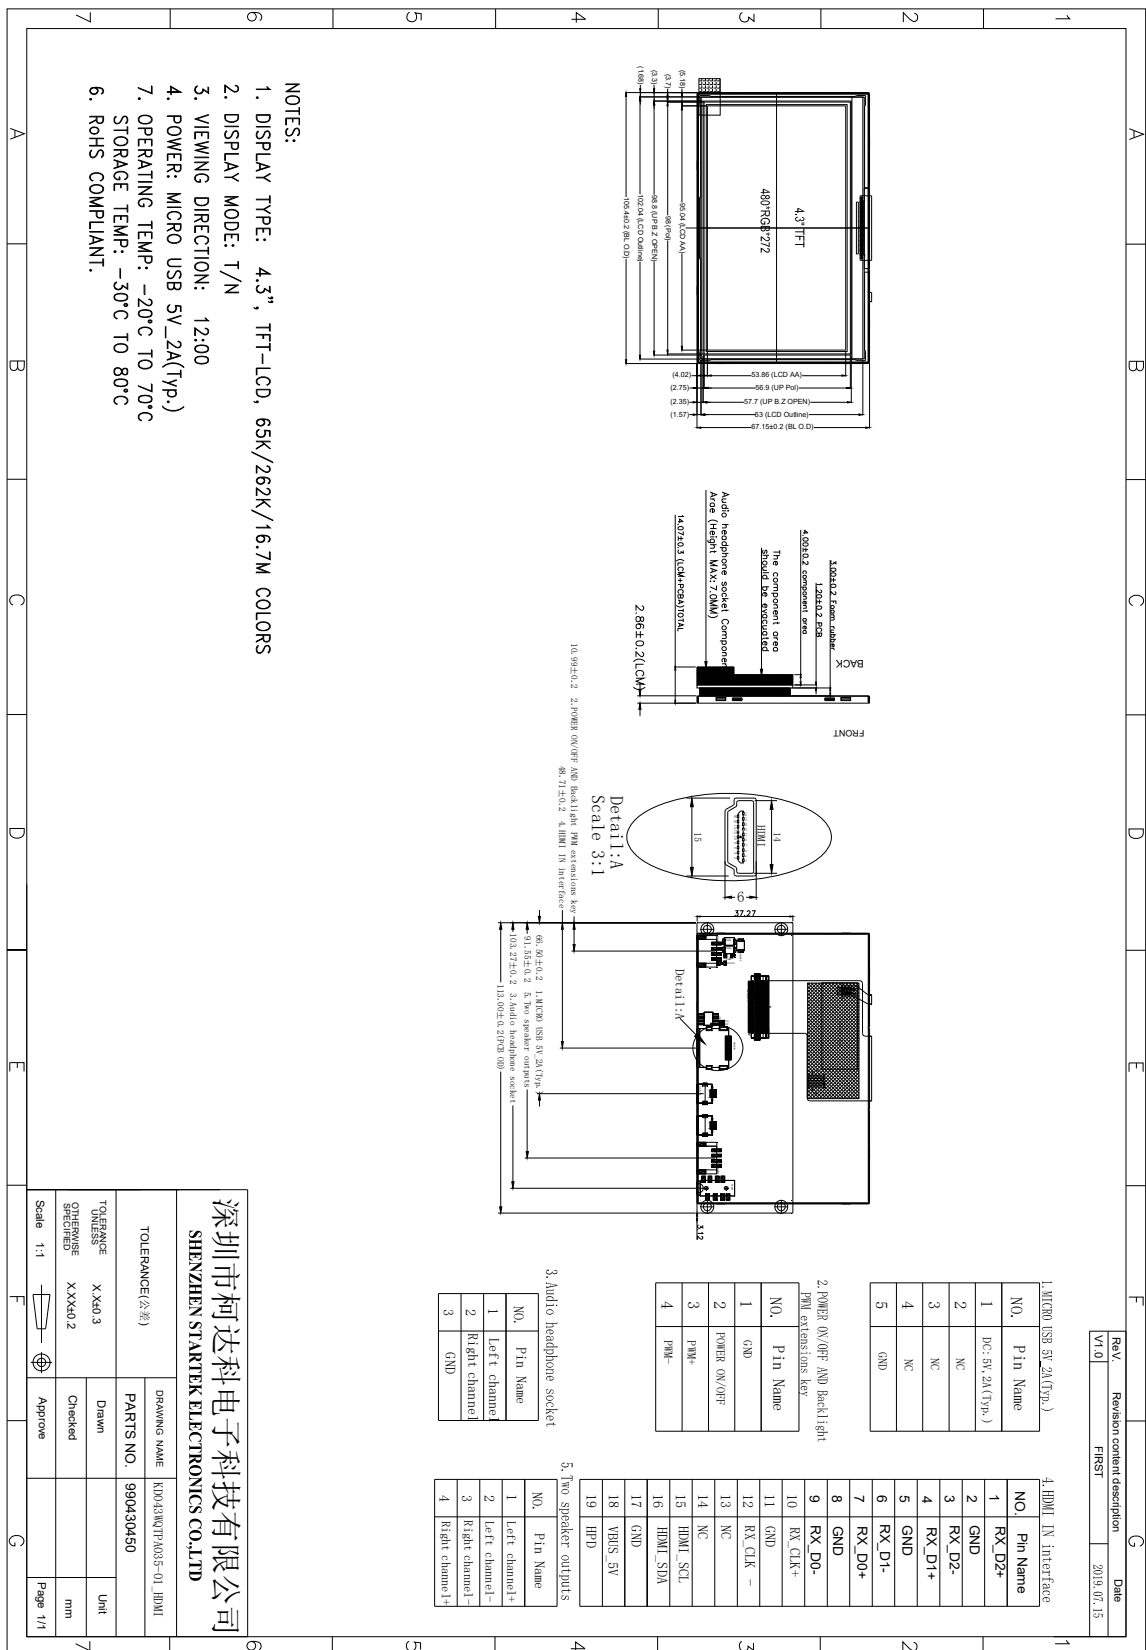

Part. No

KD043WQTPA035-01_HDMI

REV

V1.0

Page 7 of 33

常备库存
Stock For Sale

长期供货
Long Time supply

支持小量
NO MOQ

品种齐全
In Full Range






2. Input Terminal Pin Assignment

2.1 MICRO USB 5V_2A(Typ.) PIN Definition & Signal Connector

NO.	SYMBOL	DISCRIPTION	I/O
1	DC:5V,2A(Typ.)	Supply voltage(5.0V,2A Typ.).	P
2	NC	No Connection.	
3	NC	No Connection.	
4	NC	No Connection.	
5	GND	Ground.	P

Note: Mirco-USB Connector Dimension:

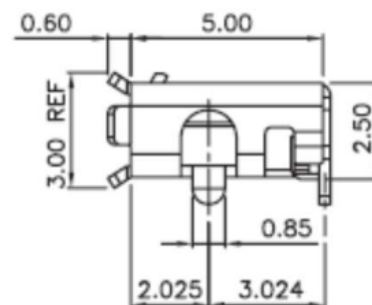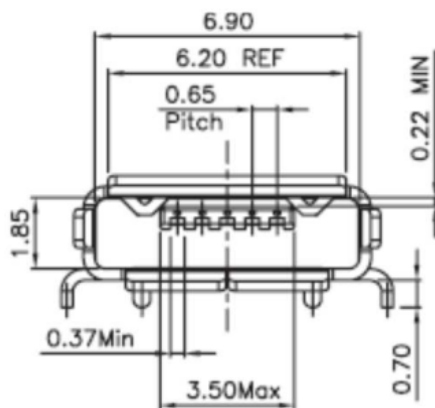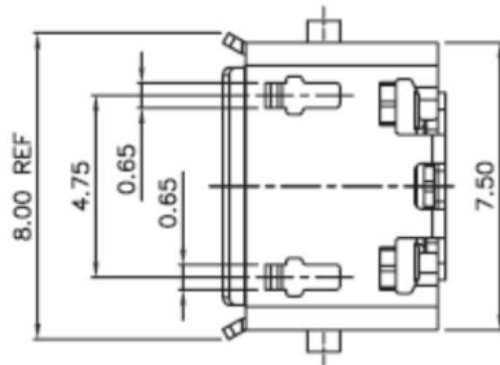






Part. No	KD043WQTPA035-01_HDMI	REV	V1.0	Page 8 of 33
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



2.2 POWER ON/OFF AND Backlight PWM extensions key PIN Definition & Signal Connector

note: SMT PH2.0mm spacing connector 4p

NO.	SYMBOL	DISCRIPTION
1	GND	Ground
2	POWER ON/OFF	ON/OFF KEY
3	PWM+	The backlight brightness of each button is increased by one level u ntil the maximum brightness reaches (9 level).
4	PWM-	The backlight brightness of each button is reduced by one evel until the lowest brightness reaches (level 9).

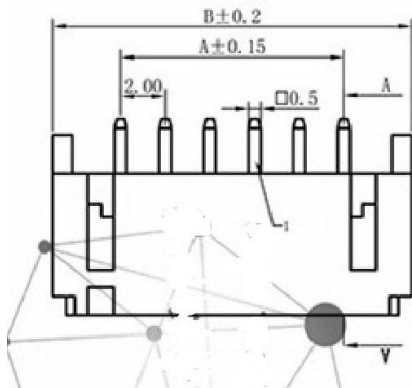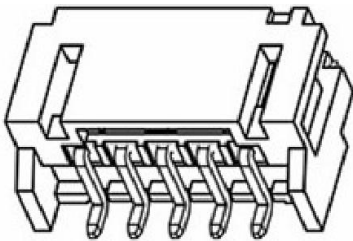
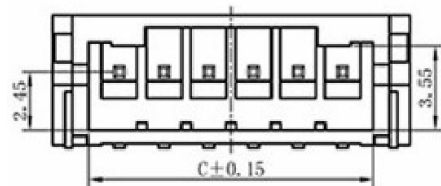


孔位 poles	A	B	C
2	2.00	8.00	4.75
3	4.00	10.00	6.75
4	6.00	12.00	8.75
5	8.00	14.00	10.75
6	10.00	16.00	12.75
7	12.00	18.00	14.75
8	14.00	20.00	16.75
9	16.00	22.00	18.75



2.3 Audio headphone socket PIN Define & Input Signal Connector

NO.	SYMBOL	DISCRIPTION
1	Left channel	Audio output left channel
2	Right channel	Audio output right channel
3	GND	Ground
4	GND	Ground

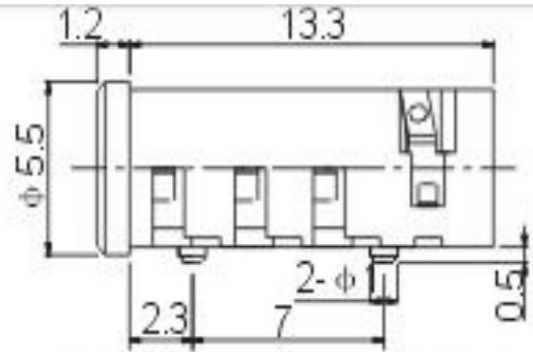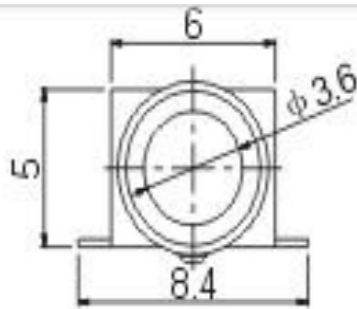


P.C.B Layout(copper-sided view)

2.4 Two speaker outputs PIN Define & Input Signal Connector

note: SMT PH2.0mm spacing connector 4p

NO.	SYMBOL	DISCRIPTION
1	Left channel+	Audio output left channel
2	Left channel-	
3	Right channel-	Audio output right channel
4	Right channel+	

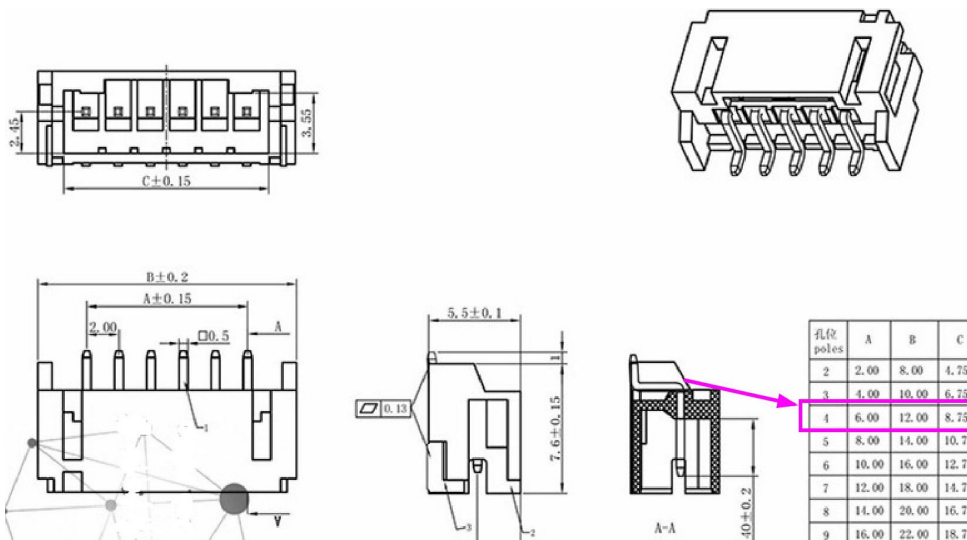



Part. No	KD043WQTPA035-01_HDMI	REV	V1.0	Page 10 of 33
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



2.5 HDMI PIN Defintion & Signal Connector

NO.	SYMBOL	DISCRIPTION	I/O
1	RX_D2+	HDMI Receiver channel 2 positive analog input.	I
2	GND	Ground.	P
3	RX_D2-	HDMI Receiver channel 2 negative analog input.	I
4	RX_D1+	HDMI Receiver channel 1 positive analog input.	I
5	GND	Ground.	P
6	RX_D1-	HDMI Receiver channel 1 negative analog input.	I
7	RX_D0+	HDMI Receiver channel 0 positive analog input.	I
8	GND	Ground.	P
9	RX_D0-	HDMI Receiver channel 0 negative analog input.	I
10	RX_CLK+	HDMI Receiver clock positive analog input.	I
11	GND	Ground.	P
12	RX_CLK-	HDMI Receiver clock negative analog input.	I
13	NC	No connect	
14	NC	No connect	
15	HDMI_SCL	HDMI Receiver DDC data channel.	I/O
16	HDMI_SDA	HDMI Receiver DDC clock channel.	I
17	GND	Ground.	P
18	HDMI_5V	HDMI Supply voltage (5.0V).	P
19	HPD	HDMI Receiver hot plug detect output	O

Note : HDMI Connector Dimension:

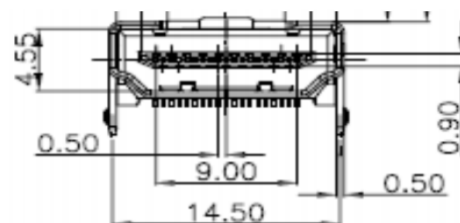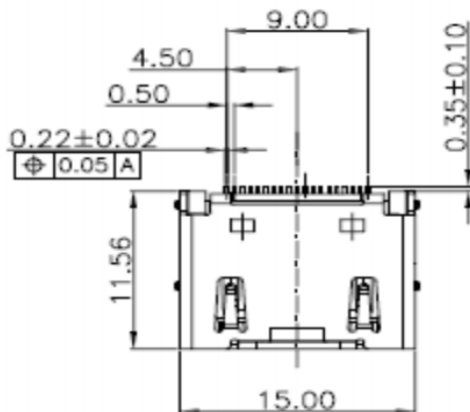

Part. No	KD043WQTPA035-01_HDMI	REV	V1.0	Page 11 of 33
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



3. Operating Instructions:

3.1 This product supports the following operating systems: Windows 7/8/10, Raspberry Pi, Ubuntu, Android.

3.2 Connect the HDMI cable to Windows 7/8/10 or Raspberry Pi or Ubuntu or Android.

3.3 Connect the micro USB DC POWER.

4. LCD Optical Characteristics

4.1 Optical specification

Item		Symbol	Condition	Min.	Typ.	Max.	Unit.	Note
Contrast Ratio		CR	$\Theta=0$ Normal viewing angle		350	--		
Response time	Rising	T_R+T_F		--	30	45	msec	
	Falling			--				
Color gamut		S(%)		--	50	--	%	
Color Filter Chromaticity	White	W_X		0.241	0.281	0.321		
		W_Y		0.248	0.288	0.328		
	Red	R_X		0.543	0.583	0.623		
		R_Y		0.291	0.331	0.371		
	Green	G_X		0.299	0.339	0.379		
		G_Y		0.570	0.610	0.650		
	Blue	B_X		0.115	0.155	0.195		
		B_Y		0.035	0.075	0.115		
Viewing angle	Hor.	Θ_L	CR>10	--	70	--		
		Θ_R		--	70	--		
	Ver.	Θ_U		--	60	--		
		Θ_D		--	70	--		
Option View Direction		12:00 O"Clock						




4.2 Measuring Condition

- Measuring surrounding: dark room
- Ambient temperature: $25 \pm 2^\circ\text{C}$
- 15min. warm-up time.

Note 1. Ambient condition : $25^\circ\text{C} \pm 2^\circ\text{C}$, $60 \pm 10\% \text{RH}$, under 10 Lunx in the darkroom .

Note 2. Measure device : BM-5A (TOPCON) , viewing cone= 2° , $I_L=20\text{mA}$.

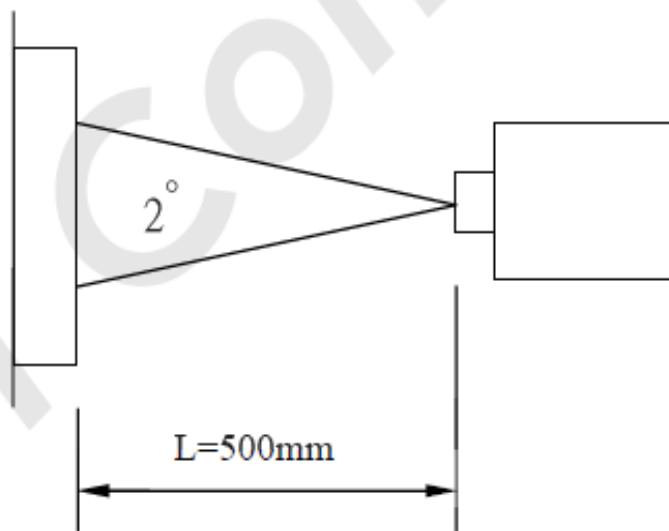


Note 3. Definition of Contrast Ratio :

$\text{CR} = \text{White Luminance (ON)} / \text{Black Luminance (OFF)}$


Part. No	KD043WQTPA035-01_HDMI	REV	V1.0	Page 13 of 33
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



Note 4. Definition of response time : The response time is defined as the time interval between the 10% and 90% amplitudes.

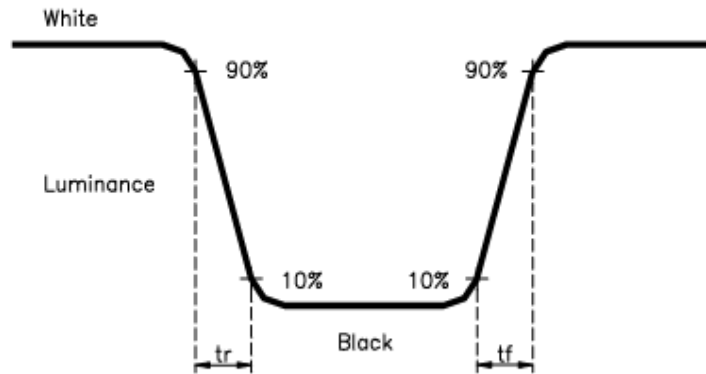

Note 5. Definition of view angle(θ , ψ) :

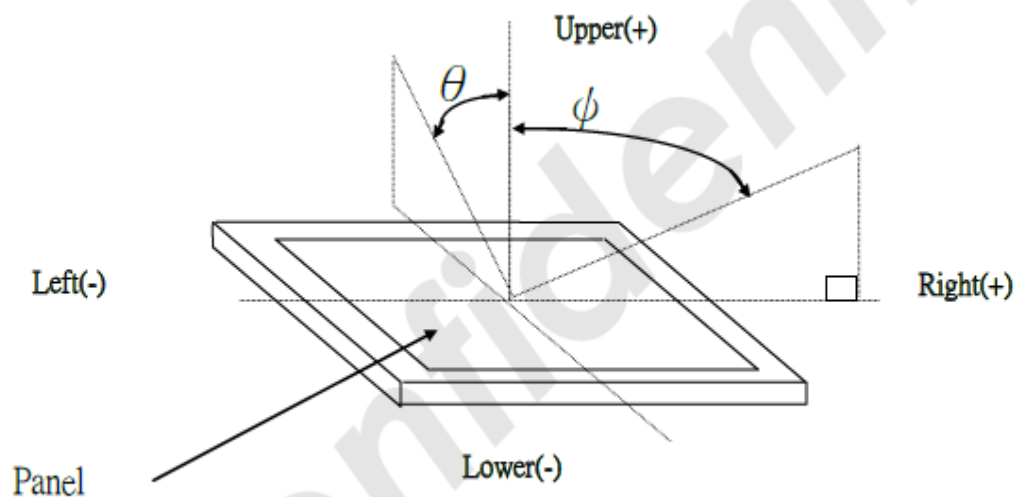

Note 6. Light source: C light.

Part. No	KD043WQTPA035-01_HDMI	REV	V1.0	Page 14 of 33
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



5. Electrical Characteristics:

5.1 Absolute Maximum Rating

Item	Symbol	Min.	Max.	Unit	Remake
Power supply voltage (Analog)	VDD-GND	-0.3	6.0	V	
	VDDp.GND	-0.3	6.0	V	
Input signal voltage (LED)	V _(LED)	-0.3	6.0	V	LED_EN
Input signal voltage (PWR)	V _(PWR)	-0.3	5.5	V	DCDC EN
Operating temperature	T _{OP}	-20	+70	°C	
Storage temperature	T _{ST}	-30	+80	°C	

NOTE1: If the products are exceeding the above range, they may be permanently damaged.

5.2 DC Electrical Characteristics

Characteristics	Symbol	Min.	Typ.	Max.	Unit	Note
Digital Supply Voltage	VDD	3.0	3.3	3.6	V	
Normal mode Current consumption	IDD	--	25	--	mA	
Level input voltage	V _{IH}	0.7V _{DD}		V _{DD}	V	
	V _{IL}	GND		0.3V _{DD}	V	
Level output voltage	V _{OH}	V _{DD} -0.4		V _{DD}	V	
	V _{OL}	GND		GND+0.4	V	

Part. No	KD043WQTPA035-01_HDMI	REV	V1.0	Page 15 of 33
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



5.3 LED Backlight Characteristics


The back-light system is edge-lighting type with 9 chips White LED

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Forward Current	I_F	15	20	--	mA	
Forward Voltage	V_F	--	28.8	--	V	
LCM Luminance	L_v	430	480	--	cd/m ²	Note3
LED life time	Hr	50000	--	--	Hour	Note1,2
Uniformity	AVg	80	--	--	%	Note3

Note (1) LED life time (Hr) can be defined as the time in which it continues to operate under the condition:

$T_a = 25 \pm 3^\circ \text{C}$, typical IL value indicated in the above table until the brightness becomes less than 50%.

Note (2) The “LED life time” is defined as the module brightness decrease to 50% original brightness at $T_a = 25^\circ \text{C}$ and $I_L = 20 \text{mA}$. The LED lifetime could be decreased if operating I_L is larger than 20mA. The constant current driving method is suggested.




B/L Circuit

Part. No	KD043WQTPA035-01_HDMI	REV	V1.0	Page 16 of 33
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



NOTE 3: Luminance Uniformity of these 9 points is defined as below:

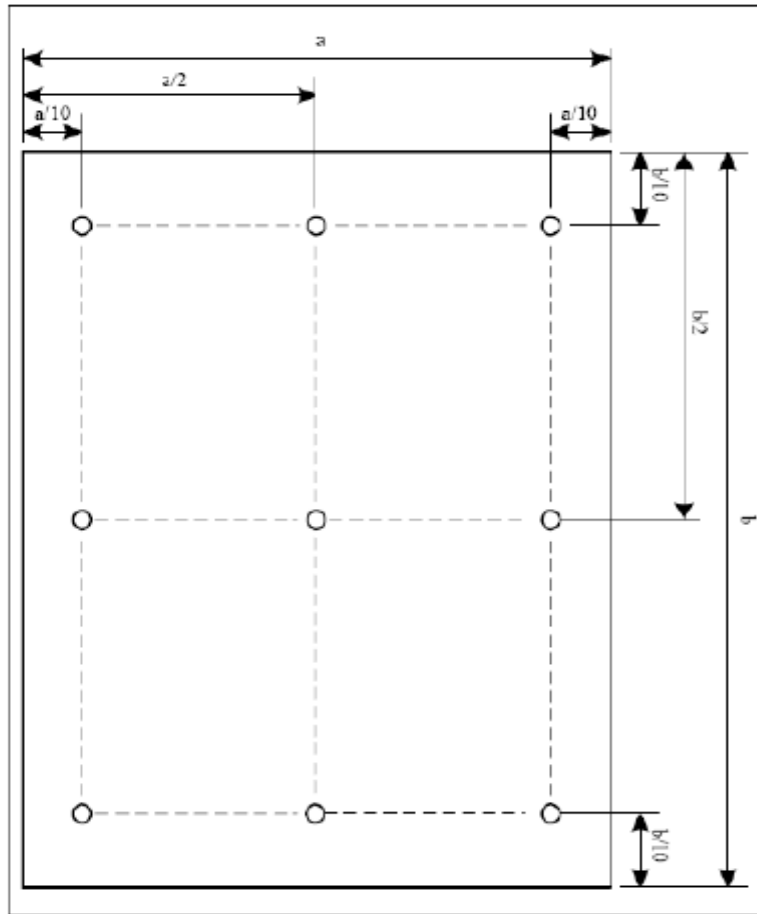

$$\text{Uniformity} = \frac{\text{minimum luminance in 9 points (1-9)}}{\text{maximum luminance in 9 points (1-9)}}$$

$$\text{Luminance} = \frac{\text{Total Luminance of 9 points}}{9}$$

Part. No	KD043WQTPA035-01_HDMI	REV	V1.0	Page 17 of 33
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



6. TFT AC Characteristic

6.1 Input signal characteristics

AC Electrical Characteristics (VDDIO=VDD=3.0 to 3.6v, GND=0V, TA=-20 to +85 °C)



Item	Symbol	Min.	Typ.	Max.	Unit	Conditions
System operation timing						
VDD power source slew time	TPOR	-	-	20	ms	From 0V to 99% VDD
GRB pulse width	tRSTW	10	50	-	us	R=10Kohm, C=1uF
Input/ Output timing						
CLK pulse duty	Tcw	40	50	60	%	
Hsync width	Thw	1	-	-	DCLK	
Hsync period	Th	55	60	65	us	
Vsync setup time	Tvst	12	-	-	ns	
Vsync hold time	Tvhd	12	-	-	ns	
Hsync setup time	Thst	12	-	-	ns	
Hsync hold time	Thhd	12	-	-	ns	
Data setup time	Tdsu	12	-	-	ns	
Data hold time	Tdhd	12	-	-	ns	
SD output stable time	Tst	-	-	12	us	Output settled within +20mV Loading = 6.8k+28.2pF.
GD output rise and fall time	Tgst	-	-	6	us	Output settled (5%~95%), Loading = 4.7k+29.8pF
3-wire serial communication						
Delay between CSB and Vsync	Tcv	1			us	
CS input setup time	Ts0	50			ns	
Serial data input setup time	Ts1	50			ns	
CS input hold time	Th0	50			ns	
Serial data input hold time	Th1	50			ns	
SCL pulse high width	Twh1	50			ns	
SCL pulse low width	Twl1	50			ns	
CS pulse high width	Tw2	400			ns	

Part. No	KD043WQTPA035-01_HDMI	REV	V1.0	Page 18 of 33
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	




6.2 AC Timing Diagram


6.2.1 Clock and Data Input Timing Diagram

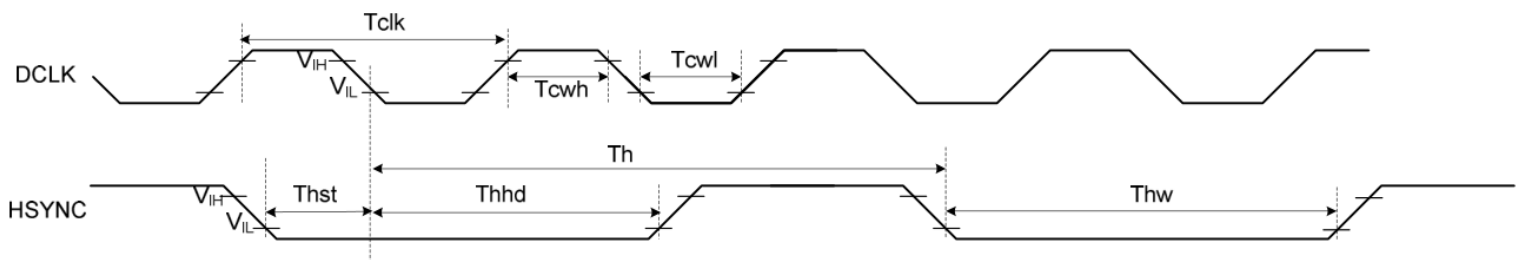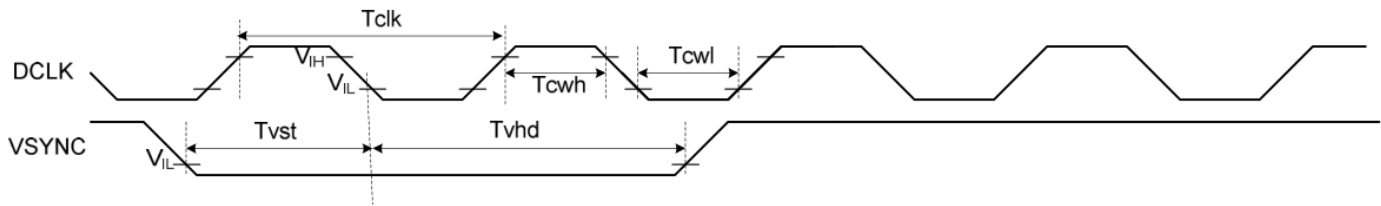

6.2.2 SYNC Mode

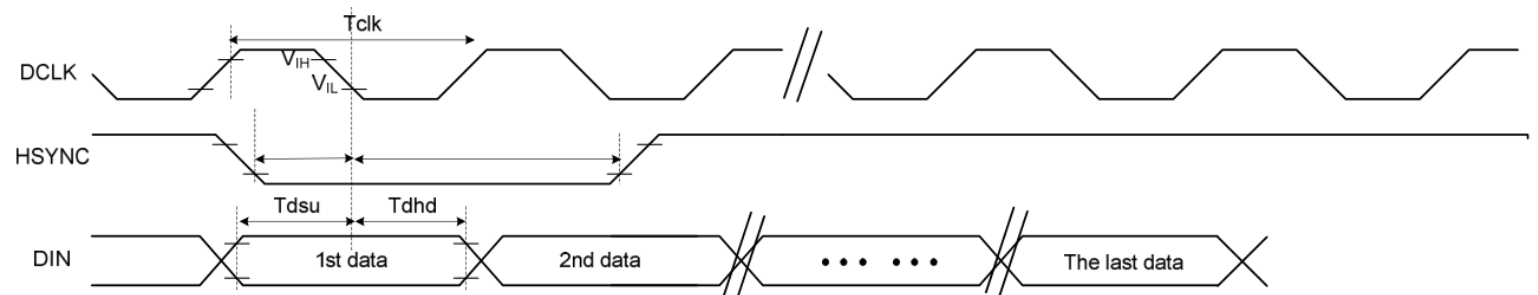


6.2.3 SYNC-DE Mode

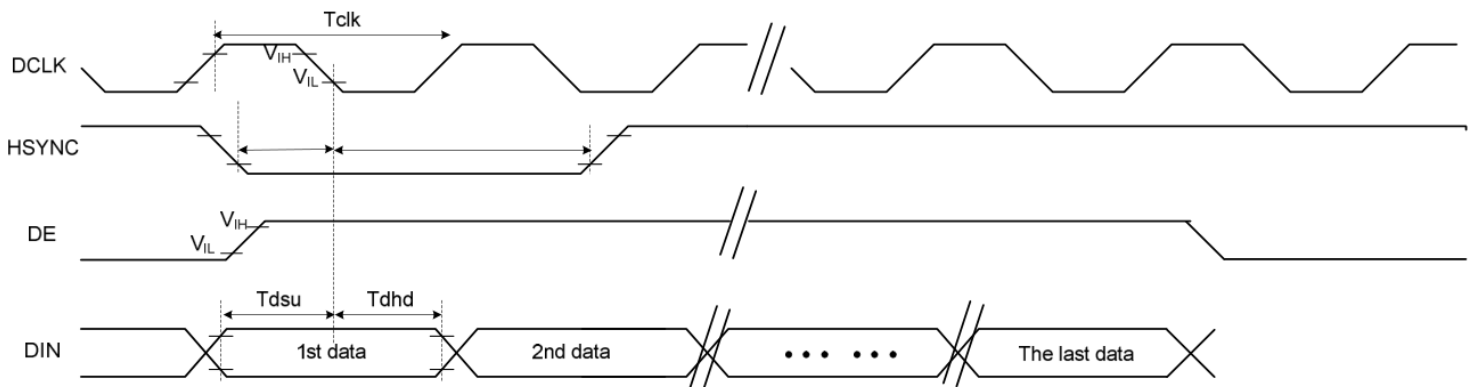

Part. No	KD043WQTPA035-01_HDMI	REV	V1.0	Page 19 of 33
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



6.3 3-Wire Communication Timing Diagram

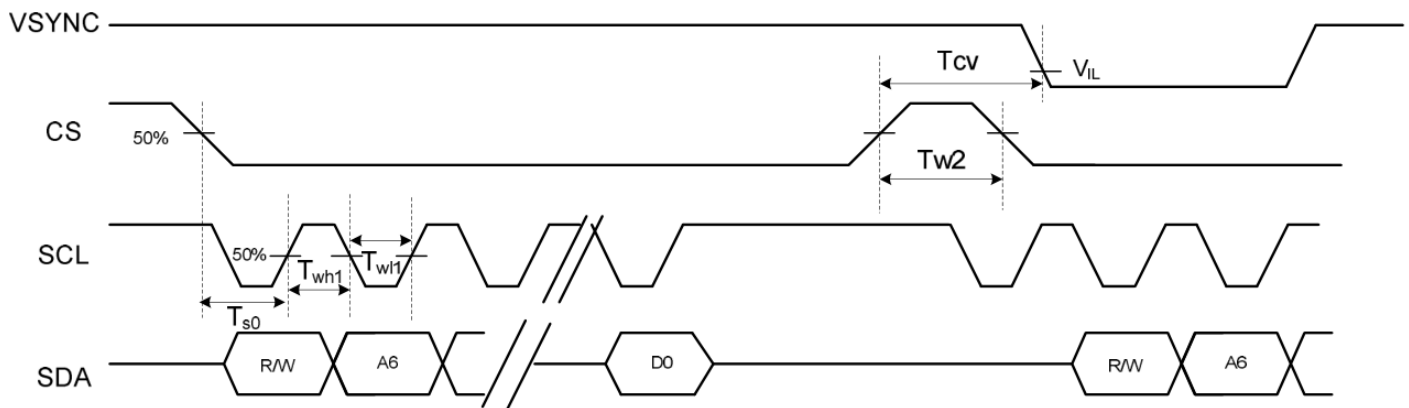

6.4 RGB Input Timing Table

6.4.1 Parallel 24-bit RGB Timing Table

Item		Symbol	Min.	Typ.	Max.	Unit	Remark
DCLK Frequency		Fclk	8	9	12	MHz	
DCLK Period		Tclk	83	111	125	ns	
HSYNC	Period Time	Th	485	525	532	DCLK	
	Display Period	Thdisp		480		DCLK	
	Back Porch	Thbp	3	43	50	DCLK	By H_Blanking setting
	Front Porch	Thfp	2	2	2	DCLK	
	Pulse Width	Thw	1	1	1	DCLK	
VSYNC	Period Time	Tv	275	285	303	H	
	Display Period	Tvdisp		272		H	
	Back Porch	Tvbp	2	12	30	H	By V_Blanking setting
	Front Porch	Tvfp	1	1	1	H	
	Pulse Width	Tvw	1	1	1	H	




6.4.2 Series 8-bit RGB Timing Table

Item		Symbol	Min.	Typ.	Max.	Unit	Remark
DCLK Frequency		Fclk	24	27	30	MHz	
DCLK Period		Tclk	33	37	42	ns	
HSYNC	Period Time	Th	1560	1716	1900	DCLK	
	Display Period	Thdisp		1440		DCLK	
	Back Porch	Thbp	108	129	255	DCLK	By H_Blanking setting
	Front Porch	Thfp	12	147	205	DCLK	
	Pulse Width	Thw	1	1	50	DCLK	
VSYNC	Period Time	Tv	274	288	335	H	
	Display Period	Tvdisp		272		H	
	Back Porch	Tvbp	1	12	32	H	By V_Blanking setting
	Front Porch	Tvfp	1	4	31	H	
	Pulse Width	Tvw	1	10	30	H	




6.5 SYNC Mode Timing Diagram

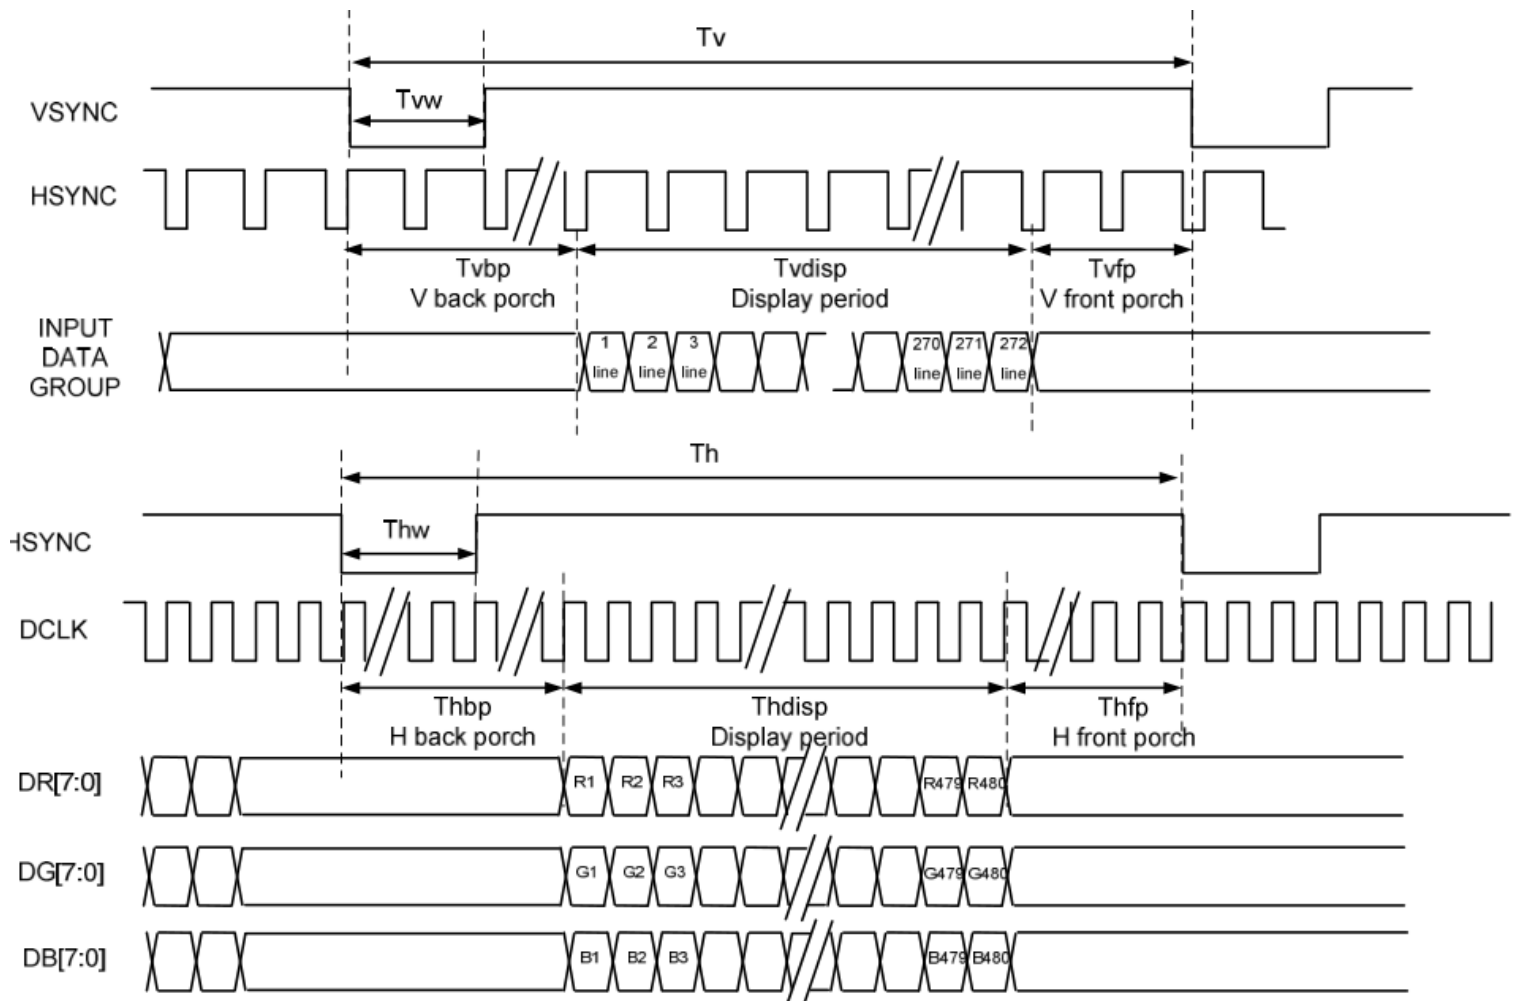

Part. No	KD043WQTPA035-01_HDMI	REV	V1.0	Page 22 of 33
常 备 库 存 Stock For Sale	长 期 供 货 Long Time supply	支持小量 NO MOQ	品 种 齐 全 In Full Range	



6.6 SYNC-DE Mode Timing Diagram

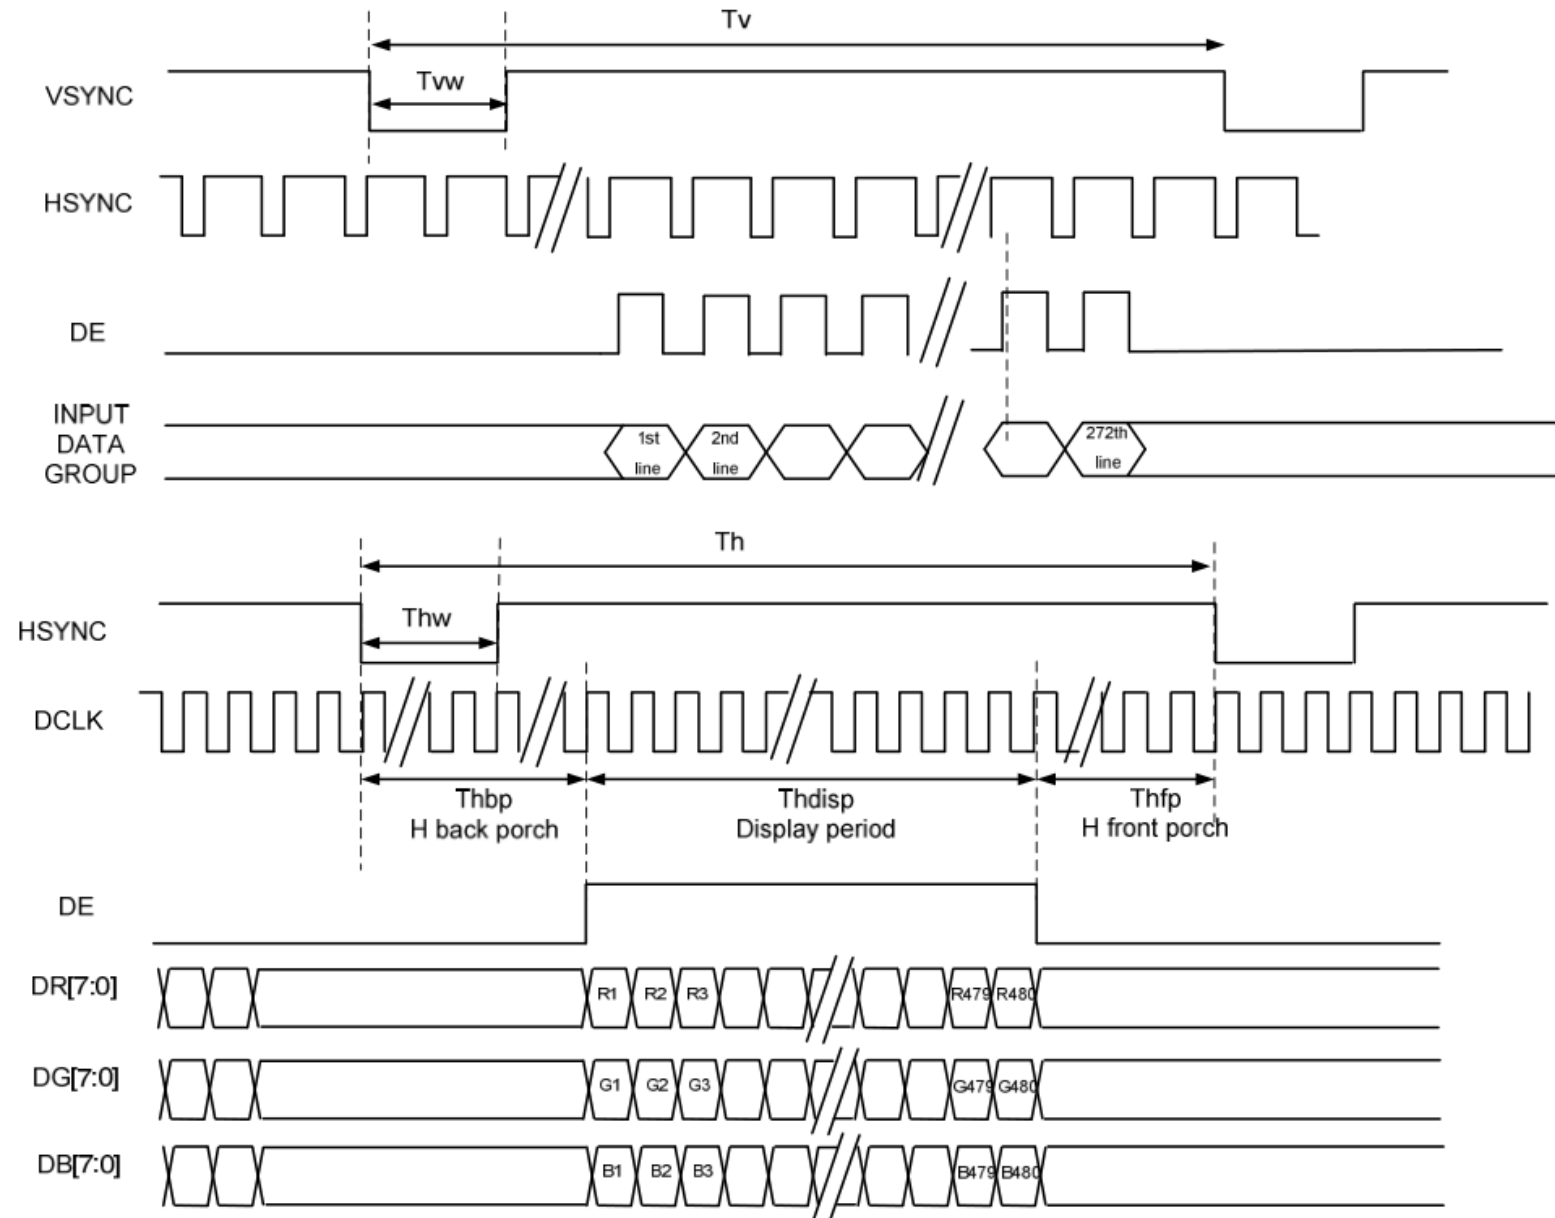

Part. No	KD043WQTPA035-01_HDMI	REV	V1.0	Page 23 of 33
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



7. LCD Module Out-Going Quality Level

7.1 VISUAL & FUNCTION INSPECTION STANDARD

7.1.1 Inspection conditions

Inspection performed under the following conditions is recommended.


Temperature : $25\pm 5^{\circ}\text{C}$

Humidity : $65\%\pm 10\%\text{RH}$


Viewing Angle : Normal viewing Angle.

Illumination: Single fluorescent lamp (300 to 700Lux)

Viewing distance:30-50cm

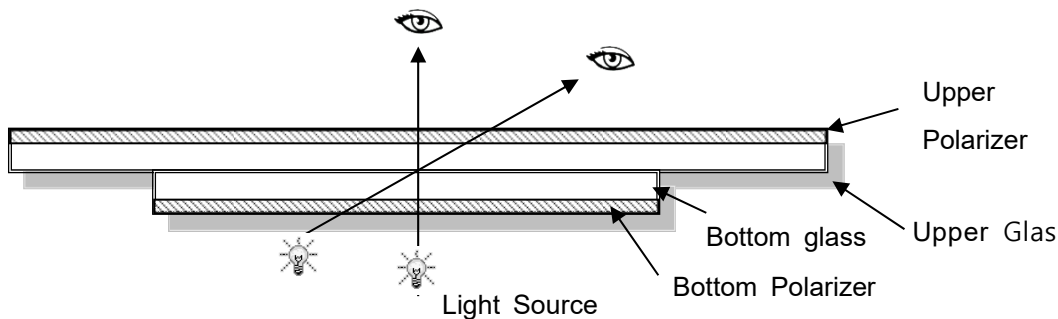

7.1.2 Definition

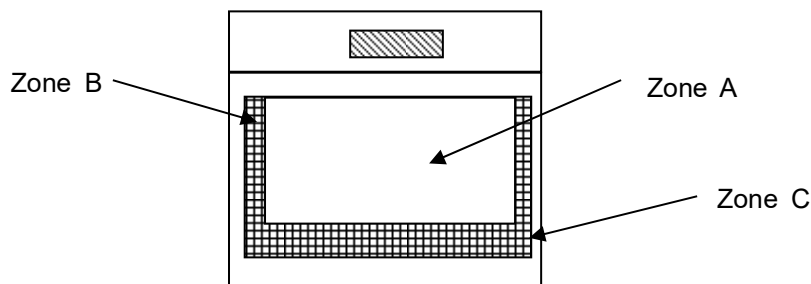

Zone A : Effective Viewing Area(Character or Digit can be seen)

Zone B : Viewing Area except Zone A

Zone C : Outside (Zone A+Zone B) which can not be seen after assembly by customer .)

Zone D : IC Bonding Area

Note:

As a general rule ,visual defects in Zone C can be ignored when it doesn't effect product function or appearance after assembly by customer

Part. No	KD043WQTPA035-01_HDMI	REV	V1.0	Page 24 of 33
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



7.1.3 Sampling Plan

According to GB/T 2828.1-2003 ; , normal inspection, Class II

AQL:

Major defect	Minor defect
0.65	1.5




LCD: Liquid Crystal Display , TP: Touch Panel , LCM: Liquid Crystal Module

No	Items to be inspected	Criteria	Classification of defects
1	Functional defects	1) No display, Open or miss line 2) Display abnormally, Short 3) Backlight no lighting, abnormal lighting. 4) TP no function	Major
2	Missing	Missing component	
3	Outline dimension	Overall outline dimension beyond the drawing is not allowed	
4	Color tone	Color unevenness, refer to limited sample	Minor
5	Spot Line defect	Light dot, Dim spot, Polarizer Bubble ; Polarizer accidented spot.	
6	Soldering appearance	Good soldering , Peeling off is not allowed.	
7	LCD/Polarizer/TP	Black/White spot/line, scratch, crack, etc.	

Part. No	KD043WQTPA035-01_HDMI	REV	V1.0	Page 25 of 33
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	




7.1.4 Criteria (Visual)

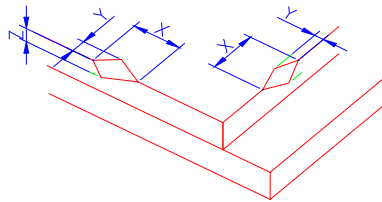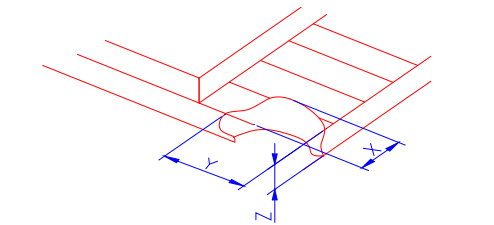Number	Items	Criteria(mm)						
1.0 LCD Crack/Broken NOTE: X: Length Y: Width Z: Height L: Length of IT O, T: Height of LCD	(1) The edge of LCD broken	 <table><tr><td>X</td><td>Y</td><td>Z</td></tr><tr><td>≤3.0mm</td><td><Inner border line of the seal</td><td>≤T</td></tr></table>	X	Y	Z	≤3.0mm	<Inner border line of the seal	≤T
	X	Y	Z					
	≤3.0mm	<Inner border line of the seal	≤T					
(2)LCD corner broken	 <table><tr><td>X</td><td>Y</td><td>Z</td></tr><tr><td>≤3.0mm</td><td>≤L</td><td>≤T</td></tr></table>	X	Y	Z	≤3.0mm	≤L	≤T	
X	Y	Z						
≤3.0mm	≤L	≤T						
(3) LCD crack	 Crack Not allowed							



2.0

Spot defect



X

$$\Phi = (X + Y) / 2$$

① light dot (LCD/TP/Polarizer black/white spot , light dot, pinhole, dent, stain)

Zone Size (mm)	Acceptable Qty		
	A	B	C
$\Phi \leq 0.10$	Ignore		Ignore
$0.10 < \Phi \leq 0.25$	3(distance $\geq 10\text{mm}$)		
$0.25 < \Phi \leq 0.3$	2		
$\Phi > 0.35$	0		

② Dim spot (LCD/TP/Polarizer dim dot, light leakage, dark spot)

Zone Size (mm)	Acceptable Qty		
	A	B	C
$\Phi \leq 0.1$	Ignore		Ignore
$0.10 < \Phi \leq 0.25$	3(distance $\geq 10\text{mm}$)		
$0.25 < \Phi \leq 0.3$	2		
$\Phi > 0.35$	0		

③ Polarizer accidented spot

Zone Size (mm)	Acceptable Qty		
	A	B	C
$\Phi \leq 0.2$	Ignore		Ignore
$0.3 < \Phi \leq 0.5$	2(distance $\geq 10\text{mm}$)		
$\Phi > 0.5$	0		

④ Pixel bad points (light dot, Dim dot, color dot)

Zone Size (mm)	Acceptable Qty		
	A	B	C
$\Phi \leq 0.1$	Ignore	Ignore	
$0.15 < \Phi \leq 0.25$	2(distance $\geq 10\text{mm}$)		
$\Phi > 0.3$	0		

⑤ Polarizer Bubble

Zone	Acceptable Qty
------	----------------

Part. No

KD043WQTPA035-01_HDMI

REV

V1.0

Page 27 of 33

常备库存
Stock For Sale

长期供货
Long Time supply

支持小量
NO MOQ



品种齐全
In Full Range



3.0	Line defect (LCD/TP /Polarizer backlight black/white line, scratch, stain)	Width(mm)	Length(m m)	Acceptable Qty		
				A	B	C
		$\Phi\leq0.05$	Ignore	Ignore		Ignore
		$0.05<W\leq0.06$	$L\leq4.0$	$N\leq3$		
		$0.07<W\leq0.08$	$L\leq3.0$	$N\leq2$		
$0.08<W$		Define as spot defect				
4.0	Electronic Components SMT	Not allow missing parts, solderless connection, cold solder joint, mismatch, The positive and negative polarity opposite				
5.0	Display color& Brightness	1. Color: Measuring the color coordinates, The measurement standard according to the datasheet or samples. 2. Brightness: Measuring the brightness of White screen, The measurement standard according to the datasheet or Samples.				
6.0	LCD Mura	By 5% ND filter invisible.				

7.0	CTP Related	CTP Cover sensor acc identified black/white spot	Size Φ (mm)	Acceptable Qty			
				A	B	C	
			$\Phi \leq 0.1$	Ignore		Ignore	
			$0.1 < \Phi \leq 0.2$				
			$0.20 < \Phi \leq 0.25$	2			
			$\Phi > 0.3$	0			
		CTP Cover scratch					
			Width(mm)	Ignore (mm)	Acceptable Qty		
					A	B	C
			$\Phi \leq 0.05$	Ignore	Ignore		
			$0.05 < W \leq 0.06$	$L \leq 4.0$	$N \leq 3$		
			$0.07 < W \leq 0.08$	$L \leq 3.0$	$N \leq 2$		
$0.08 < W$	Define as spot defect						

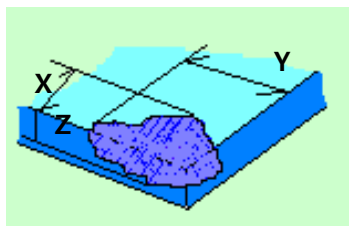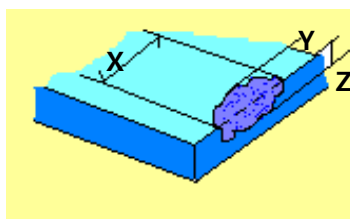

		CTP Cover Pinhole/ Lack of ink <table><tr><th rowspan="2">Zone Size (mm)</th><th colspan="2">Acceptable Qty</th></tr><tr><th colspan="2">C</th></tr><tr><td>$\Phi \leq 0.1$</td><td colspan="2">Ignore</td></tr><tr><td>$0.1 < \Phi \leq 0.2$</td><td colspan="2">3(distance $\geq 10\text{mm}$)</td></tr><tr><td>$0.25 < \Phi \leq 0.3$</td><td colspan="2">2</td></tr><tr><td>$\Phi > 0.35$</td><td colspan="2">0</td></tr></table>	Zone Size (mm)	Acceptable Qty		C		$\Phi \leq 0.1$	Ignore		$0.1 < \Phi \leq 0.2$	3(distance $\geq 10\text{mm}$)		$0.25 < \Phi \leq 0.3$	2		$\Phi > 0.35$	0	
Zone Size (mm)	Acceptable Qty																		
	C																		
$\Phi \leq 0.1$	Ignore																		
$0.1 < \Phi \leq 0.2$	3(distance $\geq 10\text{mm}$)																		
$0.25 < \Phi \leq 0.3$	2																		
$\Phi > 0.35$	0																		
	CTP Bonding bubble/ accident spot <table><tr><th rowspan="2">Size $\Phi(\text{mm})$</th><th colspan="2">Acceptable Qty</th></tr><tr><th>A</th><th>B</th></tr><tr><td>$\Phi \leq 0.1$</td><td colspan="2">Ignore</td></tr><tr><td>$0.15 < \Phi \leq 0.2$</td><td colspan="2">3(distance $\geq 10\text{mm}$)</td></tr><tr><td>$0.2 < \Phi \leq 0.25$</td><td colspan="2">2</td></tr><tr><td>$\Phi > 0.25$</td><td colspan="2">0</td></tr></table>	Size $\Phi(\text{mm})$	Acceptable Qty		A	B	$\Phi \leq 0.1$	Ignore		$0.15 < \Phi \leq 0.2$	3(distance $\geq 10\text{mm}$)		$0.2 < \Phi \leq 0.25$	2		$\Phi > 0.25$	0		
Size $\Phi(\text{mm})$	Acceptable Qty																		
	A	B																	
$\Phi \leq 0.1$	Ignore																		
$0.15 < \Phi \leq 0.2$	3(distance $\geq 10\text{mm}$)																		
$0.2 < \Phi \leq 0.25$	2																		
$\Phi > 0.25$	0																		
	Assembly deflection	beyond the edge of backlight $\leq 0.2\text{mm}$																	
	TP cover broken X : length Y : width Z : height <table><tr><th>X</th><th>Y</th><th>Z</th></tr><tr><td>$X \leq 0.5\text{mm}$</td><td>$Y \leq 0.5\text{mm}$</td><td>$Z < \text{cover thickness}$</td></tr></table> * Circuitry broken is not allowed.	X	Y	Z	$X \leq 0.5\text{mm}$	$Y \leq 0.5\text{mm}$	$Z < \text{cover thickness}$												
X	Y	Z																	
$X \leq 0.5\text{mm}$	$Y \leq 0.5\text{mm}$	$Z < \text{cover thickness}$																	
	TP cover broken X : length Y : width Z : height <table><tr><th>X</th><th>Y</th><th>Z</th></tr><tr><td>$X \leq 0.3\text{mm}$</td><td>$Y \leq 0.3\text{mm}$</td><td>$Z < \text{LCD thickness}$</td></tr></table> * Circuitry broken is not allowed.	X	Y	Z	$X \leq 0.3\text{mm}$	$Y \leq 0.3\text{mm}$	$Z < \text{LCD thickness}$												
X	Y	Z																	
$X \leq 0.3\text{mm}$	$Y \leq 0.3\text{mm}$	$Z < \text{LCD thickness}$																	

Criteria (functional items)

Part. No	KD043WQTPA035-01_HDMI	REV	V1.0	Page 29 of 33
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



Number	Items	Criteria (mm)
1	No display	Not allowed
2	Missing segment	Not allowed
3	Short	Not allowed
4	Backlight no lighting	Not allowed
5	TP no function	Not allowed



8. Reliability Test Results

Item	Condition	Inspection after test
High Temperature Operating	70°C,96H	Inspection after 2~4hours storage at room temperature, the sample shall be free from defects: 1.Air bubble in the LCD; 2.Non-display; 3.Missing segments/line; 4.Glass crack; 5.Current IDD is twice higher than initial value.
Low Temperature Operating	-20°C, 96HR	
High Temperature Storage	80°C, 96HR	
Low Temperature Storage	-30°C, 96HR	
High Temperature & High Humidity Operating	+60°C, 90% RH ,96 hours.	
Thermal Shock (Non-operation)	-30°C,30 min ↔ 80°C,30 min, Change time:5min 20CYC.	
ESD test	C=150pF, R=330,5points/panel Air:±8KV, 5times; Contact:±6KV, 5 times; (Environment: 15°C~35°C, 30%~60%).	
Vibration (Non-operation)	Frequency range:10~55Hz, Stroke:1.5mm Sweep:10Hz~55Hz~10Hz 2 hours for each direction of X.Y.Z. (6 hours for total) (Package condition).	
Box Drop Test	1 Corner 3 Edges 6 faces,80cm(MEDIUM BOX)	

Remark:

1.The test samples should be applied to only one test item.

2.Sample size for each test item is 5~10pcs.

3.For Damp Proof Test, Pure water(Resistance > 10MΩ) should be used.

4.In case of malfunction defect caused by ESD damage, if it would be recovered to normal state after resetting, it would be judged as a good part.

5.Failure Judgment Criterion: Basic Specification, Electrical Characteristic, Mechanical Characteristic, Optical Characteristic.

Part. No	KD043WQTPA035-01_HDMI	REV	V1.0	Page 31 of 33
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



9. Cautions and Handling Precautions

9.1 Handling and Operating the Module

- (1) When the module is assembled, it should be attached to the system firmly.
Do not warp or twist the module during assembly work.
- (2) Protect the module from physical shock or any force. In addition to damage, this may cause improper operation or damage to the module and back-light unit.
- (3) Note that polarizer is very fragile and could be easily damaged. Do not press or scratch the surface.
- (4) Do not allow drops of water or chemicals to remain on the display surface.
If you have the droplets for a long time, staining and discoloration may occur.
- (5) If the surface of the polarizer is dirty, clean it using some absorbent cotton or soft cloth.
- (6) The desirable cleaners are water, IPA (Isopropyl Alcohol) or Hexane.
Do not use ketene type materials (ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.
- (7) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contact with hands, legs, or clothes, it must be washed away thoroughly with soap.
- (8) Protect the module from static; it may cause damage to the CMOS ICs.
- (9) Use finger-stalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (10) Do not disassemble the module.
- (11) Protection film for polarizer on the module shall be slowly peeled off just before use so that the electrostatic charge can be minimized.
- (12) Pins of I/F connector shall not be touched directly with bare hands.
- (13) Do not connect, disconnect the module in the "Power ON" condition.
- (14) Power supply should always be turned on/off by the item 6.1 Power On Sequence & 6.2 Power Off Sequence

9.2 Storage and Transportation.

- (1) Do not leave the panel in high temperature, and high humidity for a long time.
It is highly recommended to store the module with temperature from 0 to 35 °C and relative humidity of less than 70%
- (2) Do not store the TFT-LCD module in direct sunlight.
- (3) The module shall be stored in a dark place. When storing the modules for a long time, be sure to adopt effective measures for protecting the modules from strong ultraviolet radiation, sunlight, or fluorescent light.
- (4) It is recommended that the modules should be stored under a condition where no condensation is allowed. Formation of dewdrops may cause an abnormal operation or a failure of the module.
In particular, the greatest possible care should be taken to prevent any module from being operated where condensation has occurred inside.
- (5) This panel has its circuitry FPC on the bottom side and should be handled carefully in order not to be stressed.

Part. No	KD043WQTPA035-01_HDMI	REV	V1.0	Page 32 of 33
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	



10. Packing

----TBD-----

Part. No	KD043WQTPA035-01_HDMI	REV	V1.0	Page 33 of 33
常 备 库 存 Stock For Sale	长 期 供 货 Long Time supply	支持小量 NO MOQ	品 种 齐 全 In Full Range	