



SPECIFICATION
FOR
LCM Module
KD035VGfIA111

MODULE No:	KD035VGfIA111
CUSTOMER:	

STARTEK	INITIAL	DATE
PREPARED BY		
CHECKED BY		
APPROVED BY		

CUSTOMER	INITIAL	DATE
APPROVED BY		

Part. No	KD035VGfIA111	REV	V1.0	Page 1 of 27
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

[illegible]

Part. No	KD035VGFIGA111	REV	V1.0	Page 2 of 27
常 备 库 存 Stock For Sale	长 期 供 货 Long Time supply	支持小量 NO MOQ	品 种 齐 全 In Full Range	

Contents

1. Block Diagram.....	5
2. Outline dimension.....	6
3. Input terminal Pin Assignment.....	7
4. LCD Optical Characteristics.....	8
4.1 Optical specification.....	8
5. Electrical Characteristics.....	10
5.1 Absolute Maximum Rating.....	10
5.2 DC Electrical Characteristics.....	10
5.3 LED Backlight Characteristics.....	11
6. AC Characteristics.....	13
6.1 MIPI Interface Characteristics:.....	13
6.2 Reset input timing.....	17
7. LCD Module Out-Going Quality Level.....	18
7.1 VISUAL & FUNCTION INSPECTION STANDARD.....	18
7.1.1 Inspection conditions.....	18
7.1.3 Sampling Plan.....	19
7.1.4 Criteria (Visual).....	20
8. Reliability Test Result.....	25
9. Cautions and Handling Precautions.....	26
9.1 Handling and Operating the Module.....	26
9.2 Storage and Transportation.....	26
10. Packing.....	27

Part. No	KD035VGfIA111	REV	V1.0	Page 3 of 27
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

* Description

This is a color active matrix TFT (Thin Film Transistor) LCD (liquid crystal display) that uses amorphous silicon TFT as a switching device. This module is composed of a BlanView type TFT-LCD Panel, driver circuit, back-light unit. The resolution of a 3.5" TFT-LCD contains 480x640 pixels, and can display up to 16.7M colors.

* Features


General Information Items	Specification	Unit	Note
	Main Panel		
Display area(AA)	53.28(H)*71.04(V) (3.5 inch)	mm	
Driver element	TFT active matrix	-	
Display colors	65K/262K/16.7M	colors	
Number of pixels	480(RGB)*640	dots	
Pixel arrangement	RGB vertical stripe	-	
Pixel pitch	0.111(H)*0.111(V)	mm	
Viewing angle	VA	o'clock	
Controller IC	ILI9806E	-	
LCM Interface	MIPI	-	
Display mode	Blan View /Normally Black	-	
Operating temperature	-20~+70	°C	
Storage temperature	-30~+80	°C	

* Mechanical Information

Item		Min.	Typ.	Max.	Unit	Note
Module size	Horizontal(H)	-	64	-	mm	
	Vertical(V)	-	85	-	mm	
	Depth(D)	-	3.1	-	mm	
Weight		-	35	-	g	




1. Block Diagram

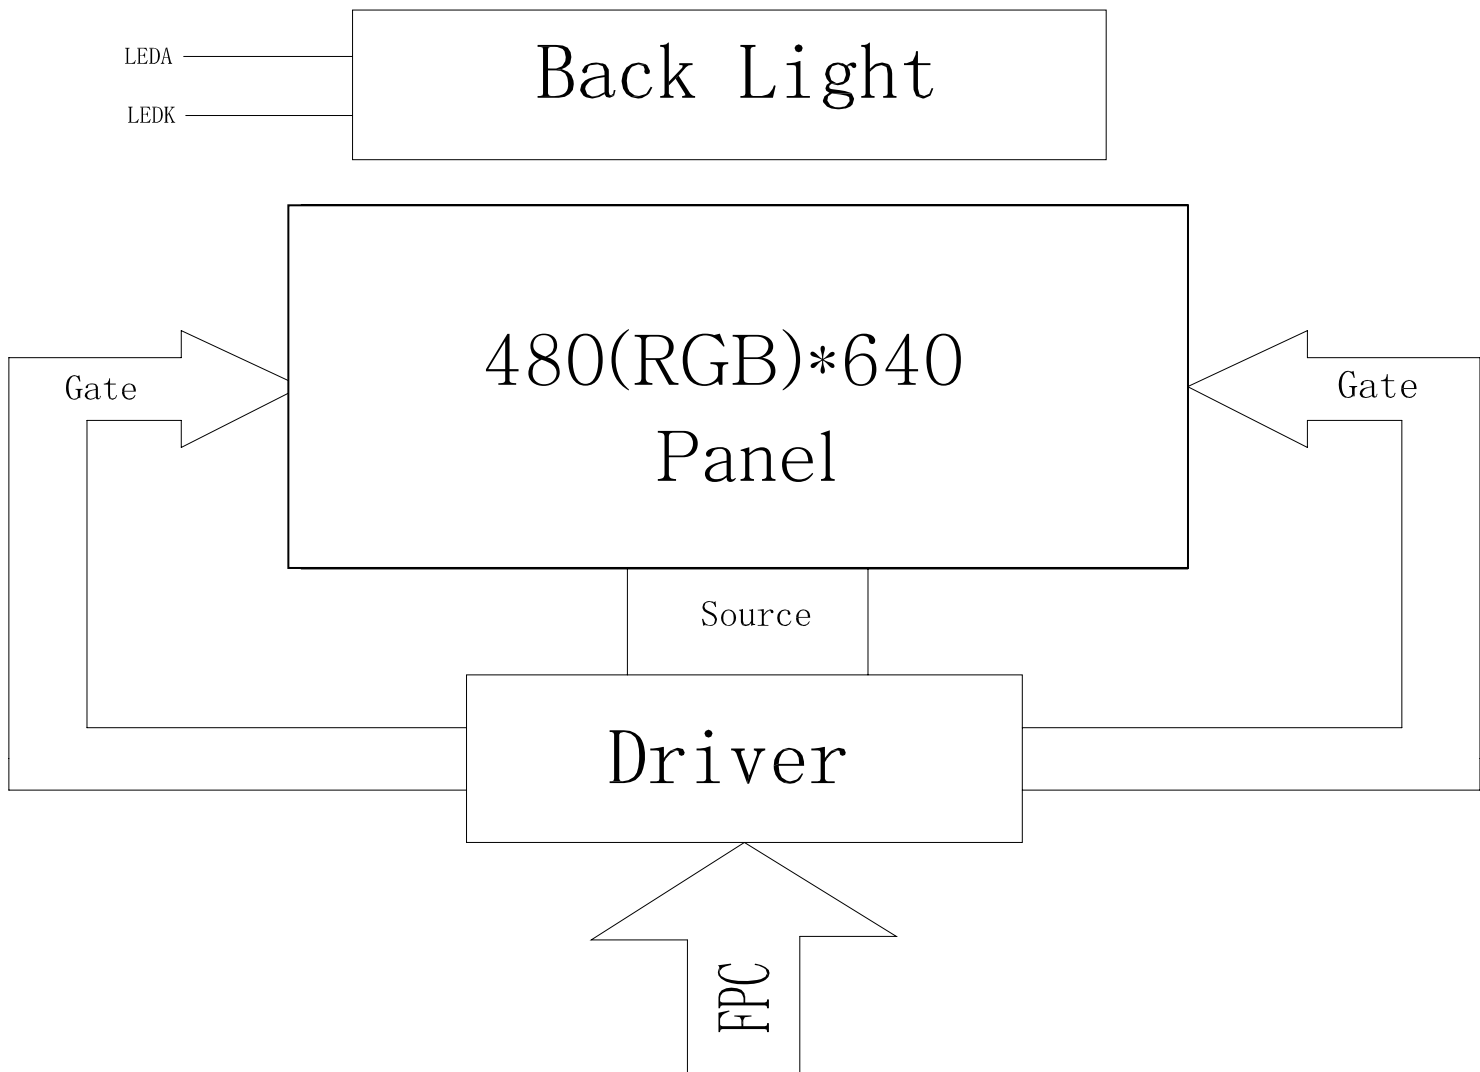

Part. No	KD035VGFIGA111	REV	V1.0	Page 5 of 27
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

2. Outline dimension

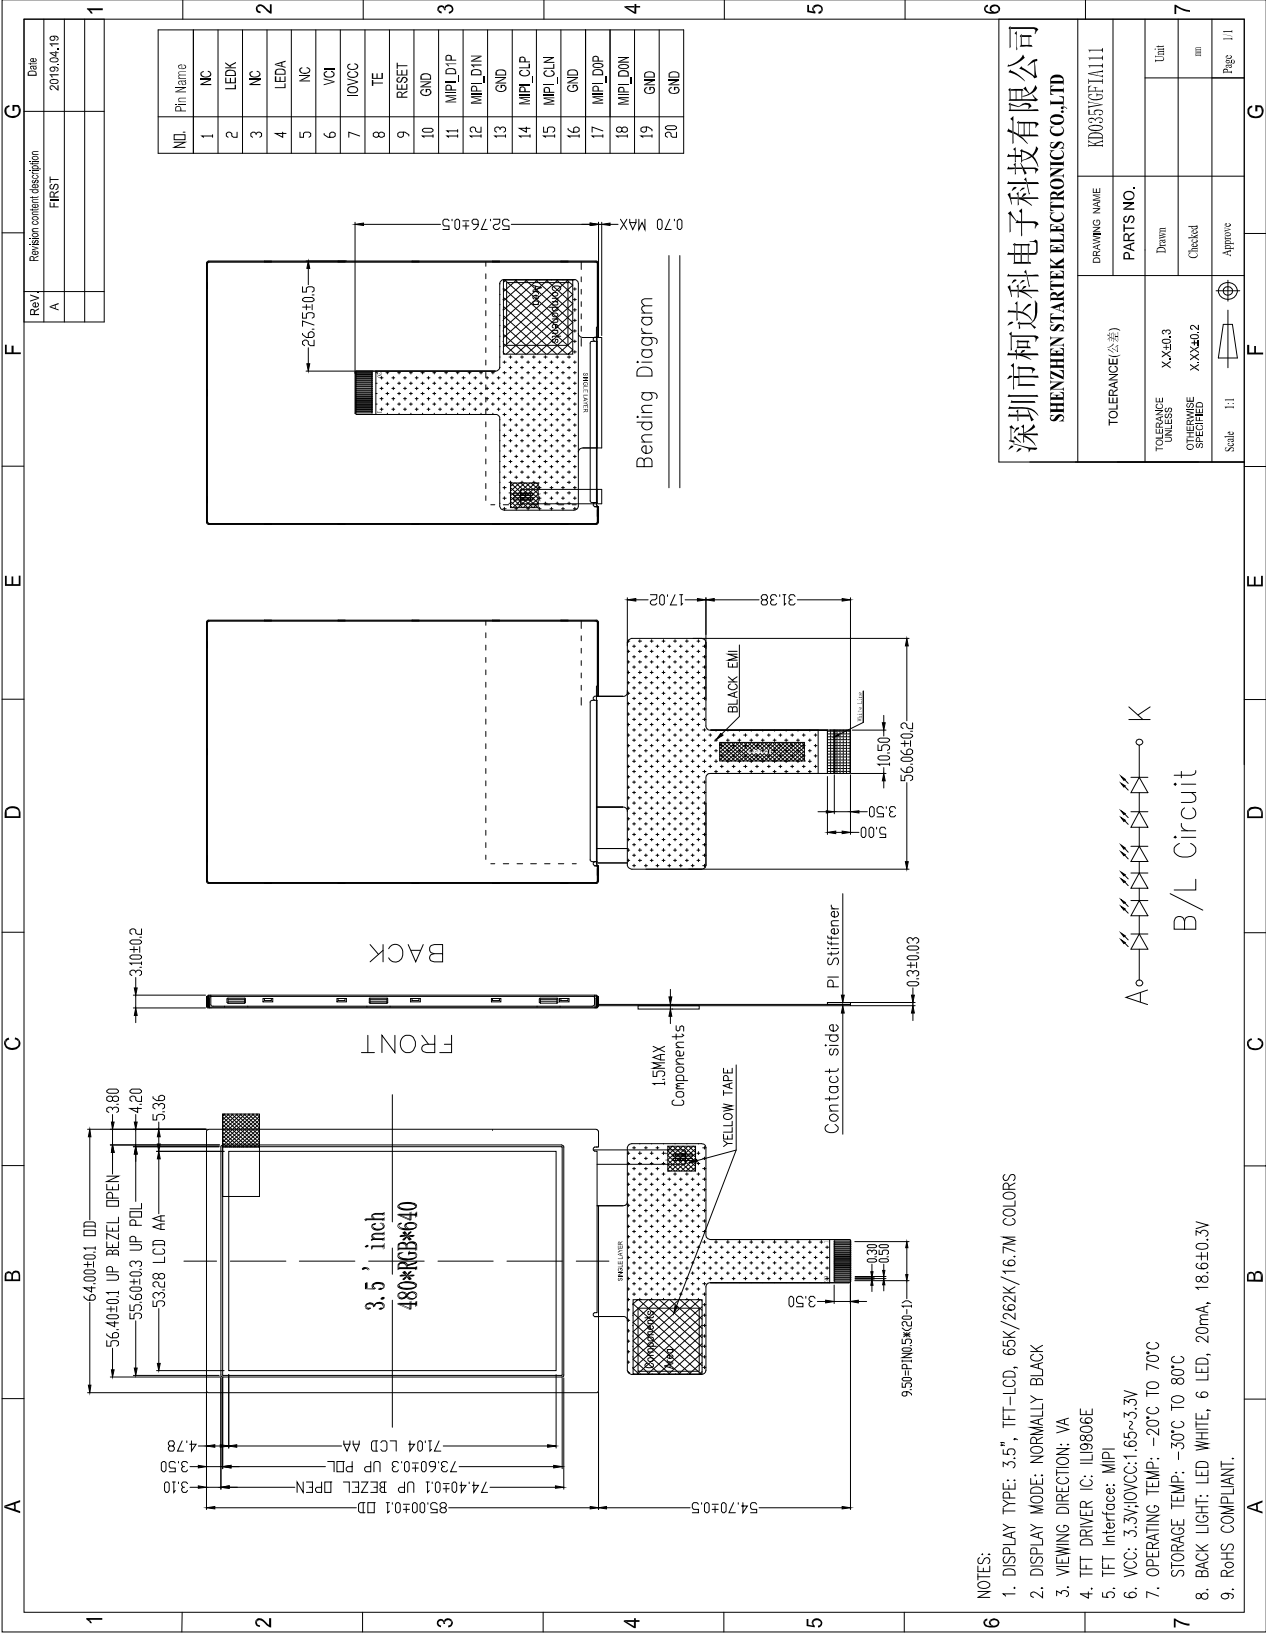


3. Input terminal Pin Assignment

NO.	SYMBOL	DISCRIPTION	I/O
1	NC		
2	LEDK	Cathode pin of backlight.	P
3	NC		
4	LEDA	Anode pin of backlight.	P
5	NC		
6	VCI	Supply Voltage (3.3V).	P
7	IOVCC	I/O power supply voltage.	P
8	TE	-Tearing effect output Leave the pin to open when not in use.	O
9	RESET	- The external reset input. Initializes the chip with a low input. Be sure to execute a power-on reset after supplying power.	I
10	GND	Ground.	P
11	MIPI_D1P	MIPI DSI differential data pair (DSI-Dn+/-).	I/O
12	MIPI_D1N		I/O
13	GND	Ground.	P
14	MIPI_CLP	MIPI DSI differential clock pair (DSI-CLK+/-).	I
15	MIPI_CLN		I
16	GND	Ground.	P
17	MIPI_D0P	MIPI DSI differential data pair (DSI-Dn+/-).	I/O
18	MIPI_D0N		I/O
19	GND	Ground.	P
20	GND	Ground.	P

4. LCD Optical Characteristics

4.1 Optical specification

Item		Symbol	Condition	Min.	Typ.	Max.	Unit.	Note
Contrast Ratio		CR	$\Theta=0$ Normal viewing angle	500	700	--		2
Response time	Rising	T_{R+T_F}		--	25	--	msec	3
	Falling							
Uniformity		S(%)		--	51.7	--	%	
Color Filter Chromaticity	White	W_X		0.2594	0.2994	0.3394		
		W_Y		0.2899	0.3299	0.3699		
	Red	R_X		0.4975	0.5375	0.5775		
		R_Y		0.2928	0.3328	0.3728		
	Green	G_X		0.2970	0.3370	0.3770		
		G_Y		0.5346	0.5746	0.6146		
	Blue	B_X		0.1139	0.1539	0.1939		
		B_Y		0.0746	0.1146	0.1546		
Viewing angle	Hor.	Θ_L	CR>10	--	80	--		
		Θ_R		--	80	--		
	Ver.	Θ_U		--	80	--		
		Θ_D		--	80	--		
Option View Direction		VA						

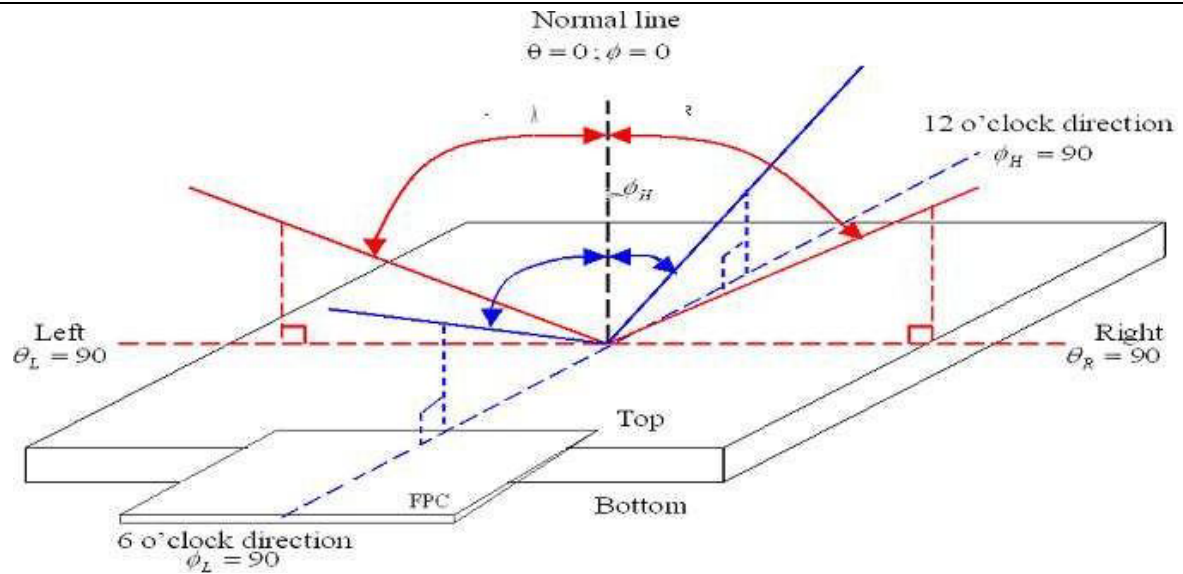


Note (2) Definition of Contrast Ratio (CR) :
measured at the center point of panel

Luminance with all pixels white

CR =

Luminance with all pixels black

Note (3) Definition of Response Time : Sum of T_R and T_F

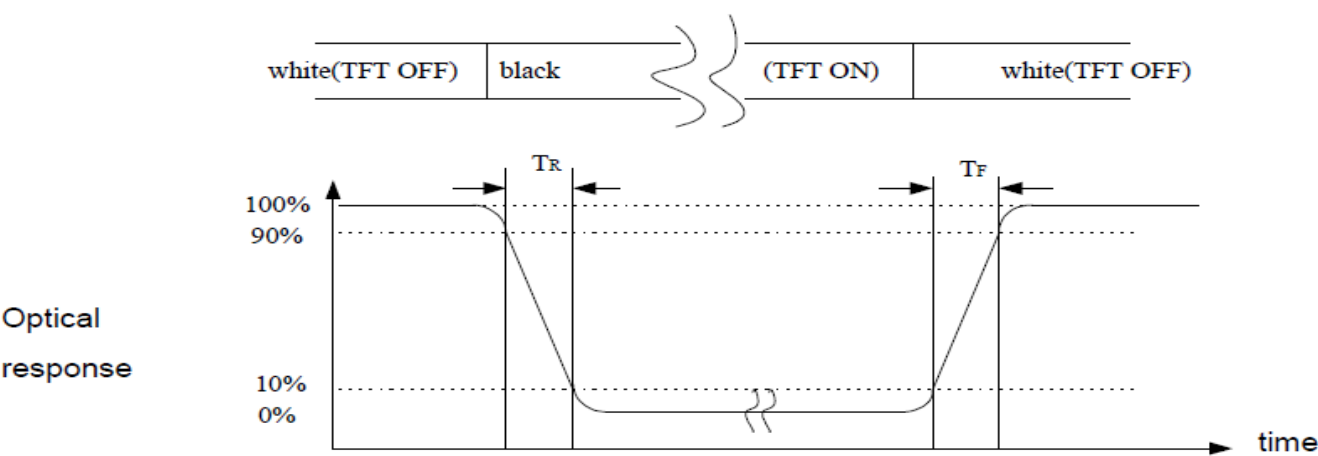

5. Electrical Characteristics

5.1 Absolute Maximum Rating

Characteristics	Symbol	Min.	Max.	Unit	Note
Digital Supply Voltage	VCI	-0.3	4.6	V	Note1
Digital interface supply Voltage	IOVCC	-0.3	4.6	V	Note1
Operating temperature	T _{OP}	-20	+70	°C	
Storage temperature	T _{ST}	-30	+80	°C	

NOTE1: If the absolute maximum rating of even is one of the above parameters is exceeded even momentarily, the quality of the product may be degraded. Absolute maximum ratings, therefore, specify the values exceeding which the product may be physically damaged. Be sure to use the product within the range of the absolute maximum ratings.

5.2 DC Electrical Characteristics

Characteristics	Symbol	Min.	Typ.	Max.	Unit	Note
Digital Supply Voltage	VCI	2.5	3.3	3.6	V	
Digital Interface Supply Voltage	IOVCC	1.65	1.8	3.6	V	
Normal mode Current	IDD	--	38	--	mA	
Differential Input High Threshold Voltage	VIT+		0	50	mV	MIPI_CLK MIPI_Data
Differential Input Low Threshold Voltage	VIT-	-50	0		mV	
Single-ended Receiver Input Operation Voltage Range	VIR	0.5		1.2	V	

5.3 LED Backlight Characteristics

The back-light system is edge-lighting type with 6 chips LED


Item	Symbol	Min.	Typ.	Max.	Unit	Note
Forward Current	I _F	15	20	--	mA	
Forward Voltage	V _F	--	18.6	--	V	
LCM Luminance (I _F =20mA)	LV	370	420	--	cd/m2	Note3
LED life time	Hr	--	50000	--	Hour	Note1,2
Uniformity	Avg	80	--	--	%	Note3

Note1: LED life time (Hr) can be defined as the time in which it continues to operate under the condition:

Ta=25±3 °C, typical IL value indicated in the above table until the brightness becomes less than 50%.


Note 2: The “LED life time” is defined as the module brightness decrease to 50% original brightness at

Ta=25℃ and IL=20mA. The LED lifetime could be decreased if operating IL is larger than 20mA. The constant current driving method is suggested.

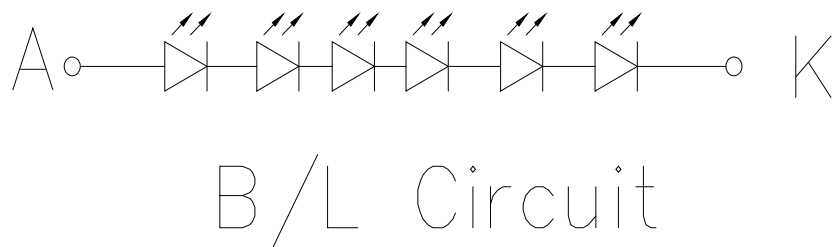

Part. No	KD035VGFIA111	REV	V1.0	Page 11 of 27
常 备 库 存 Stock For Sale	长 期 供 货 Long Time supply	支持小量 NO MOQ	品 种 齐 全 In Full Range	

Note (3) Luminance Uniformity of these 9 points is defined as below:

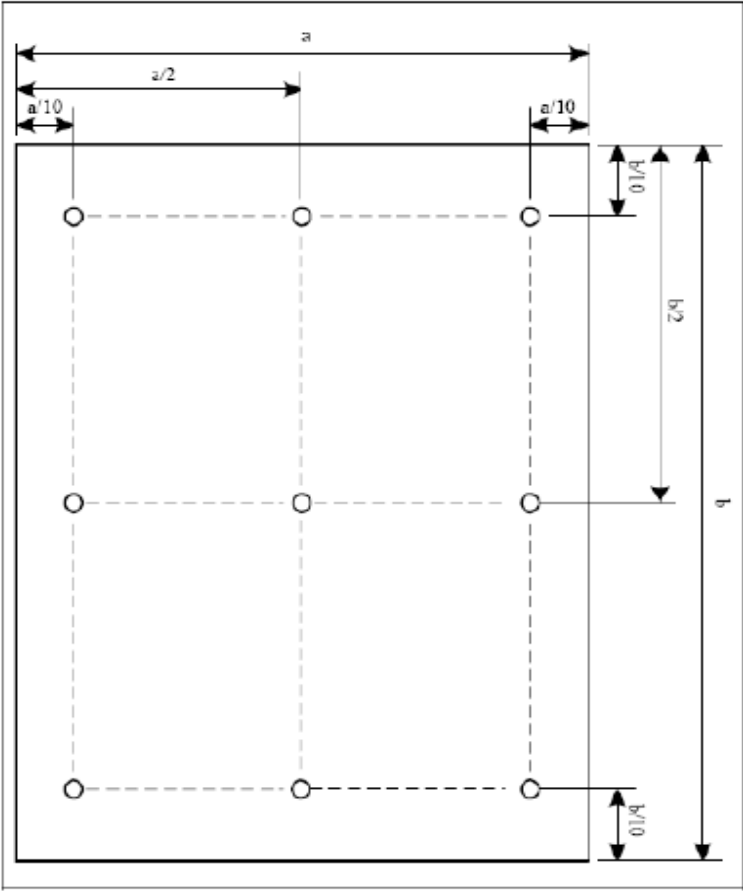

$$\text{Uniformity} = \frac{\text{minimum luminance in 9 points (1-9)}}{\text{maximum luminance in 9 points (1-9)}}$$

$$\text{Luminance} = \frac{\text{Total Luminance of 9 points}}{9}$$

6. AC Characteristics

6.1 MIPI Interface Characteristics:

6.1.1 High Speed Mode




*DSI clock channel timing


Signal	Symbol	Parameter	MIN	MAX	Unit	Description
DSI-CLK+/-	2xUI_INSTA	Double UI instantaneous	4	25	ns	
DSI-CLK+/-	UI_INSTA UI_INSTB	UI instantaneous halves	2	12.5	ns	UI = UI_INSTA = UI_INSTB
DSI-Dn+/-	tDS	Data to clock setup time	0.15	-	UI	
DSI-Dn+/-	tDH	Data to clock hold time	0.15	-	UI	

* Mipi Interface-High SpeedMode Timing Characteristics

6.1.2 Low Power Mode

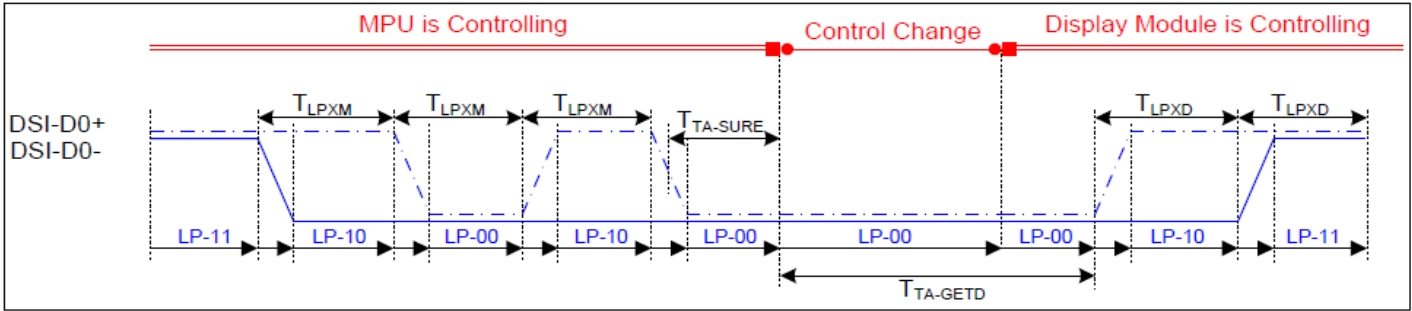

* Bus Turnaround (BTA) from display module to MPU Timing

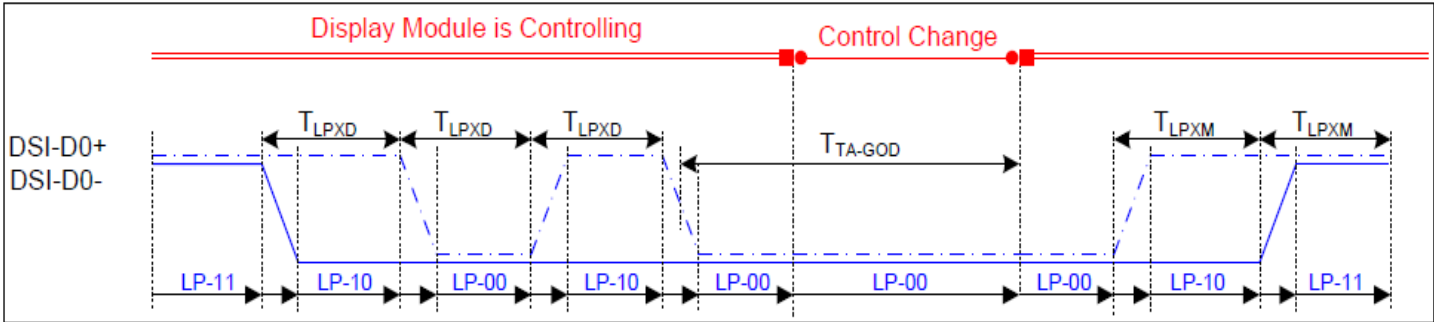


*Bus Turnaround (BTA) from MPU to display module Timing

Signal	Symbol	Parameter	MIN	MAX	Unit	Description
DSI-D0+/-	TLPXM	Length of LP-00,LP-01, LP-10 or LP-11 periods MPU→Display Module	50	75	ns	Input
DSI-D0+/-	TLPXD	Length of LP-00,LP-01, LP-10 or LP-11 periods MPU→Display Module	50	75	ns	Output
DSI-D0+/-	TTA-SURED	Time-out before the MPU start driving	TLPXD	2xTLPXD	ns	Output
DSI-D0+/-	TTA-GETD	Time to drive LP-00 by display module	5xTLPXD		ns	Input
DSI-D0+/-	TTA-GOD	Time to drive LP-00 after turnaround request-MPU	4xTLPXD		ns	Output


*Mipi Interface Low Power Mode Timing Characteristics

Part. No	KD035VGFIA111	REV	V1.0	Page 14 of 27
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

6.1.3 Bursts Mode

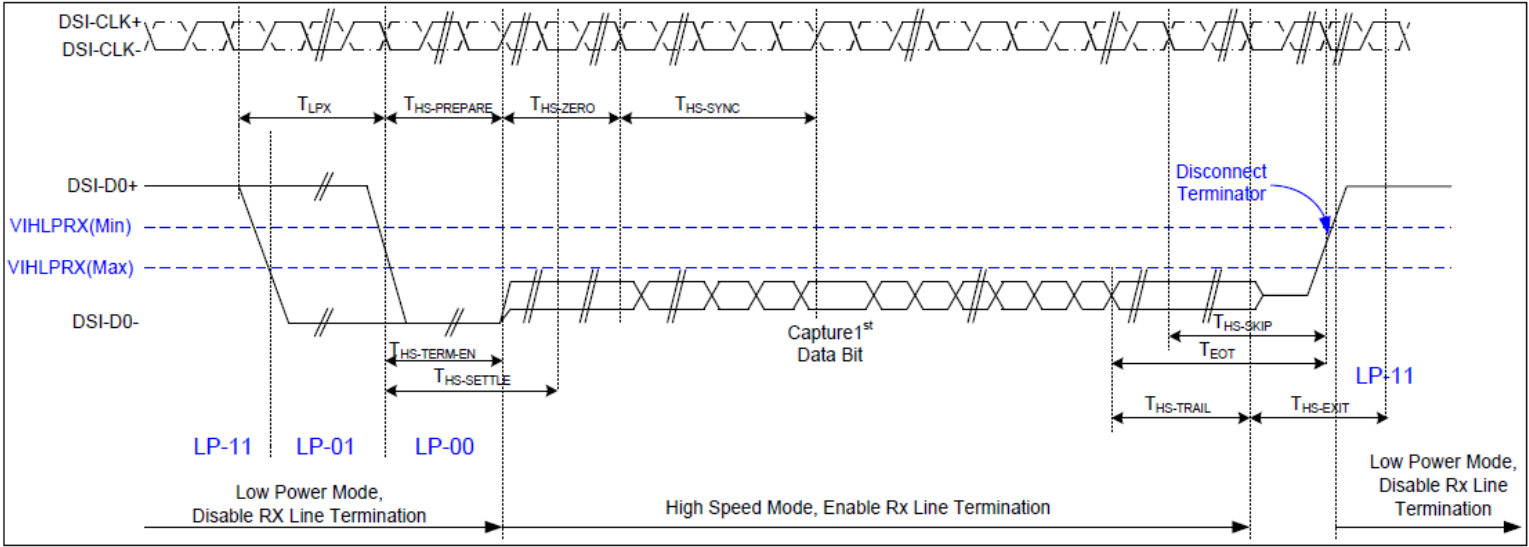

*Data lanes-Low Power Mode to/from High Speed Mode Timing

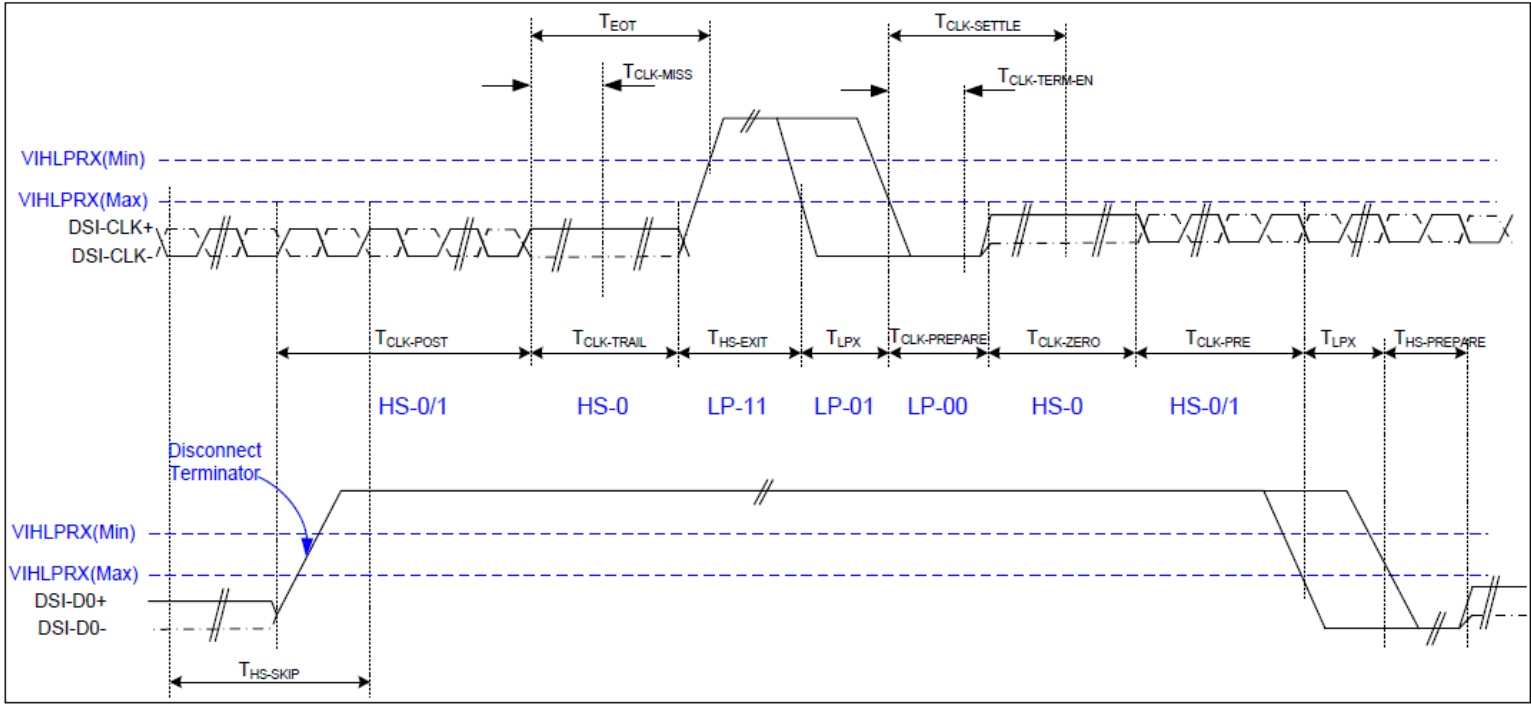

*Clock lanes- High Speed Mode to/from Low Power Mode Timing

Signal	Symbol	Parameter	MIN	MAX	Unit	Description
Low Power Mode to High Speed Mode Timing						
DSI-Dn+/-	TLPX	Length of any low power state period	50	-	ns	Input
DSI-Dn+/-	THS-PREPARE	Time to drive LP-00 to prepare for HS transmission	40+4 UI	85+8 UI	ns	Input
DSI-Dn+/-	THS-TERM-EN	Time to enable data receiver line termination measured from when Dn crosses VILMAX	-	35+4 UI	ns	Input
DSI-Dn+/-	THS-PREPARE + THS-ZERO	THS-PREPARE + time to drive HS-0 before the sync sequence	140+ 10UI	-	ns	Input
High Speed Mode to Low Power Mode Timing						
DSI-Dn+/-	THS-SKIP	Time-out at display module to ignore transition period of EoT	40	55+4 UI	ns	Input
DSI-Dn+/-	THS-EXIT	Time to drive LP-11 after HS burst	100	-	ns	Input
DSI-Dn+/-	THS-TRAIL	Time to drive flipped differential state after last payload data bit of a HS transmission burst	60+4 UI	-	ns	Input
High Speed Mode to/from Low Power Mode Timing						
DSI-CLK+/-	TCLK-POS	Time that the MPU shall continue sending HS clock after the last associated data lane has transition to LP mode	60+5 2UI	-	ns	Input
DSI-CLK+/-	TCLK-TRAIL	Time to drive HS differential state after last payload clock bit of a HS transmission burst	60	-	ns	Input
DSI-CLK+/-	THS-EXIT	Time to drive LP-11 after HS burst	100	-	ns	Input
DSI-CLK+/-	TCLK-PREPARE	Time to drive LP-00 to prepare for HS transmission	38	95	ns	Input
DSI-CLK+/-	TCLK-TERM-EN	Time-out at clock lan display module to enable HS transmission	--	38	ns	Input
DSI-CLK+/-	TCLK-PREPARE + TCLK-ZERO	Minimum lead HS-0 drive period before starting clock	300	-	ns	Input
DSI-CLK+/-	TCLK-PRE	Time that the HS clock shall be driven prior to any associated data lane beginning the transition from LP to HS mode	8UI	-	ns	Input
DSI-CLK+/-	TEOT	Time form start of TCLK-TRAIL period to start of LP-11 state	-	105n s+12 UI	ns	Input

6.2 Reset input timing

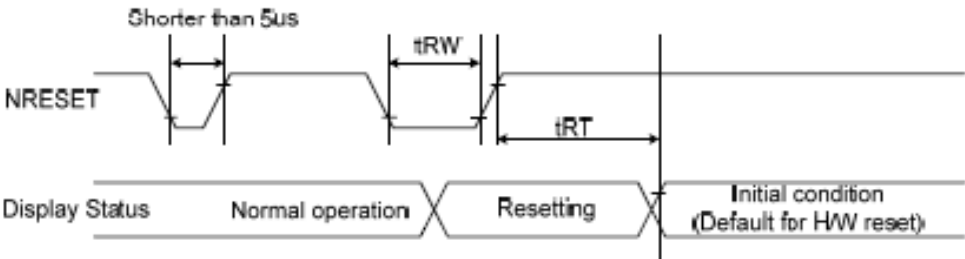


Figure 102 Reset Timing

Table 41 Reset Timing

Signal	Symbol	Parameter	Min	Max	Unit
RESX	tRW	Reset pulse duration	10		us
	tRT	Reset cancel		5(note 1,5) 120 (note 1,6,7)	ms

Note:

- The reset cancel includes also required time for loading ID bytes, VCOM setting and other settings from OTP to registers. This loading is done every time when there is H/W reset cancel time (tRT) within 5 ms after a rising edge of RESX.
- Spike due to an electrostatic discharge on RESX line does not cause irregular system reset according to the Table 43.

Table 42 Reset Descript

RESX Pulse	Action
Shorter than 5us	Reset Rejected
Longer than 9us	Reset
Between 5us and 9us	Reset starts

- During the Resetting period, the display will be blanked (The display is entering blanking sequence, which maximum time is 120 ms, when Reset Starts in Sleep Out mode. The display remains the blank state in Sleep In mode.) and then return to Default condition for Hardware Reset.
- Spike Rejection also applies during a valid reset pulse as shown below:

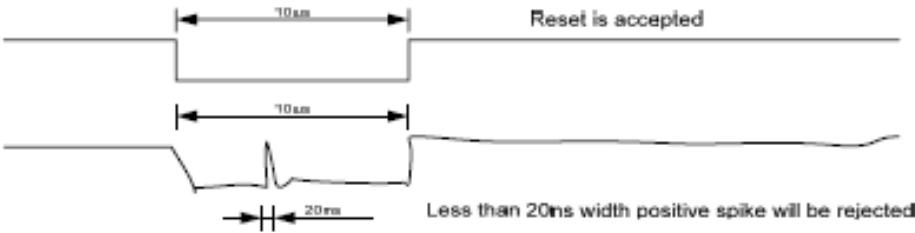


Figure 103 Positive Noise Pulse during Reset Low

- When Reset applied during Sleep In Mode.
- When Reset applied during Sleep Out Mode.
- It is necessary to wait 5msec after releasing RESX before sending commands. Also Sleep Out command cannot be sent for 120msec.


7. LCD Module Out-Going Quality Level

7.1 VISUAL & FUNCTION INSPECTION STANDARD


7.1.1 Inspection conditions

Inspection performed under the following conditions is recommended.

- Temperature : 25±5℃
- Humidity : 65%±10%RH
- Viewing Angle : Normal viewing Angle.
- Illumination: Single fluorescent lamp (300 to 700Lux)
- Viewing distance:30-50cm

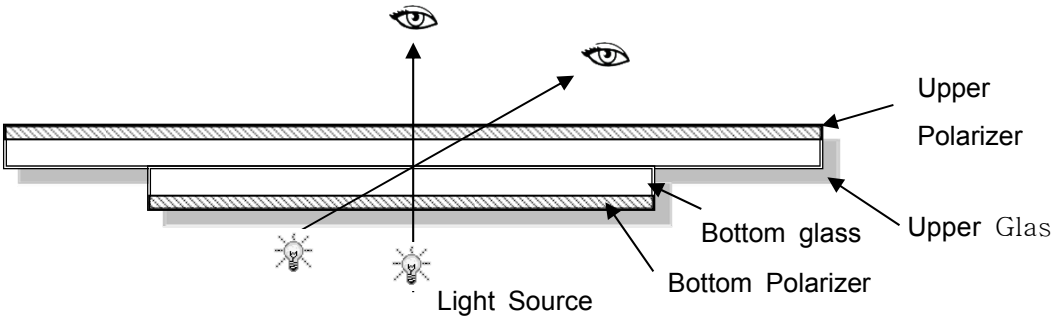

7.1.2 Definition

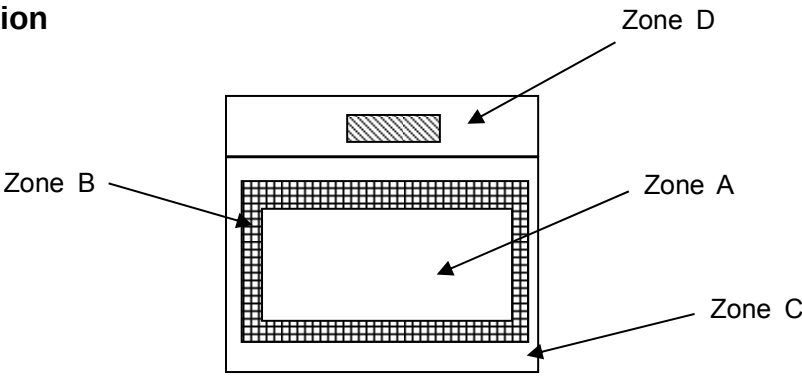

- Zone A : Effective Viewing Area(Character or Digit can be seen)
 - Zone B : Viewing Area except Zone A
 - Zone C : Outside (Zone A+Zone B) which can not be seen after assembly by customer .)
 - Zone D : IC Bonding Area
- Note:As a general rule ,visual defects in Zone C can be ignored when it doesn't effect product function or appearance after assembly by customer

Part. No	KD035VGFI A111	REV	V1.0	Page 18 of 27
常 备 库 存 Stock For Sale	长 期 供 货 Long Time supply	支持小量 NO MOQ	品 种 齐 全 In Full Range	

7.1.3 Sampling Plan

According to GB/T 2828.1-2003 ; , normal inspection, Class II




AQL:

Major defect	Minor defect
0.65	1.5

LCD: Liquid Crystal Display , TP: Touch Panel , LCM: Liquid Crystal Module


No	Items to be inspected	Criteria	Classification of defects
1	Functional defects	1) No display, Open or miss line 2) Display abnormally, Short 3) Backlight no lighting, abnormal lighting. 4) TP no function	Major
2	Missing	Missing component	
3	Outline dimension	Overall outline dimension beyond the drawing is not allowed	
4	Color tone	Color unevenness, refer to limited sample	Minor
5	Spot Line defect	Light dot, Dim spot, Polarizer Bubble ; Polarizer accidented spot.	
6	Soldering appearance	Good soldering , Peeling off is not allowed.	
7	LCD/Polarizer/TP	Black/White spot/line, scratch, crack, etc.	

7.1.4 Criteria (Visual)

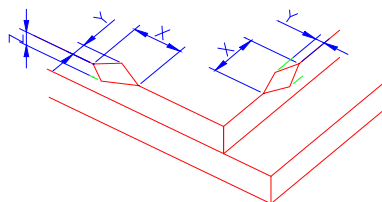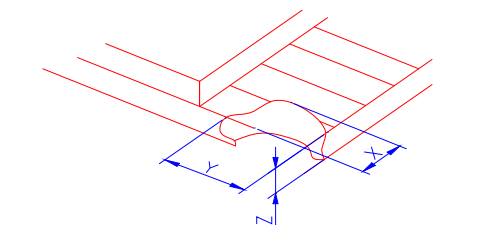Number	Items	Criteria(mm)						
1.0 LCD Crack/Broken NOTE: X: Length Y: Width Z: Height L: Length of IT O, T: Height of LCD	(1) The edge of LCD broken	 <table><tr><td>X</td><td>Y</td><td>Z</td></tr><tr><td>≤3.0mm</td><td><Inner border line of the seal</td><td>≤T</td></tr></table>	X	Y	Z	≤3.0mm	<Inner border line of the seal	≤T
	X	Y	Z					
	≤3.0mm	<Inner border line of the seal	≤T					
(2)LCD corner broken	 <table><tr><td>X</td><td>Y</td><td>Z</td></tr><tr><td>≤3.0mm</td><td>≤L</td><td>≤T</td></tr></table>	X	Y	Z	≤3.0mm	≤L	≤T	
X	Y	Z						
≤3.0mm	≤L	≤T						
(3) LCD crack	 Crack Not allowed							

2.0

Spot defect



Y

X

$$\Phi=(X+Y)/2$$

① light dot (LCD/TP/Polarizer black/white spot , light dot, pinhole, dent, stain)

Zone Size (mm)	Acceptable Qty		
	A	B	C
$\Phi\leq0.10$	Ignore		
$0.10<\Phi\leq0.25$	3(distance $\geq$ 10mm)		
$0.25<\Phi\leq0.3$	2		
$\Phi>0.35$	0		

Ignore

②Dim spot (LCD/TP/Polarizer dim dot, light leakage、dark spot)

Zone Size (mm)	Acceptable Qty		
	A	B	C
$\Phi\leq0.1$	Ignore		
$0.10<\Phi\leq0.25$	3(distance $\geq$ 10mm)		
$0.25<\Phi\leq0.3$	2		
$\Phi>0.35$	0		

Ignore

③ Polarizer accidented spot

Zone Size (mm)	Acceptable Qty		
	A	B	C
$\Phi\leq0.2$	Ignore		
$0.3<\Phi\leq0.5$	2(distance $\geq$ 10mm)		
$\Phi>0.5$	0		

Ignore

④Pixel bad points (light dot, Dim dot, color dot)

Zone Size (mm)	Acceptable Qty		
	A	B	C
$\Phi\leq0.1$	Ignore		
$0.15<\Phi\leq0.25$	2(distance $\geq$ 10mm)		
$\Phi>0.3$	0		

Ignore

⑤ Polarizer Bubble

Zone Size (mm)	Acceptable Qty		
	A	B	C
$\Phi\leq0.2$	Ignore		
$0.3<\Phi\leq0.4$	3(distance $\geq$ 10mm)		
$0.4<\Phi\leq0.5$	2		
$\Phi>0.5$	0		

Ignore

Part. No

KD035VGFIA111

REV

V1.0

Page 21 of 27

常备库存
Stock For Sale


长期供货
Long Time supply



支持小量
NO MOQ

品种齐全
In Full Range

3.0	Line defect (LCD/TP /Polarizer backlight black/white line, scratch, stain)	Width(mm)	Length(m m)	Acceptable Qty		
				A	B	C
		$\Phi\leq0.05$	Ignore	Ignore		Ignore
		$0.05<W\leq0.06$	$L\leq3.0$	$N\leq2$		
		$0.07<W\leq0.08$	$L\leq2.0$	$N\leq1$		
$0.08<W$		Define as spot defect				
4.0	Electronic Components SMT	Not allow missing parts, solderless connection, cold solder joint, mismatch, The positive and negative polarity opposite				
5.0	Display color& Brightness	1. Color: Measuring the color coordinates, The measurement standard according to the datasheet or samples. 2. Brightness: Measuring the brightness of White screen, The measurement standard according to the datasheet or Samples.				
6.0	LCD Mura	By 5% ND filter invisible.				

7.0	RTP Related	TP film bub ble/ accide nted spot				
			Size Φ (mm)	Acceptable Qty		
				A	B	C
			$\Phi \leq 0.1$	Ignore		Ignore
			$0.1 < \Phi \leq 0.2$	3 (distance $\geq 10\text{mm}$)		
			$0.25 < \Phi \leq 0.3$	2		
			$\Phi > 0.35$	0		

TP film scratch	Width(mm)	Length (mm)	Acceptable Qty		
			A	B	C
	$\Phi \leq 0.05$	Ignore	Ignore		Ignore
	$0.05 < W \leq 0.06$	$L \leq 3.0$	$N \leq 2$		
	$0.07 < W \leq 0.08$	$L \leq 2.0$	$N \leq 1$		
$0.08 < W$	Define as spot defect				
Assembly deflection	beyond the edge of backlight $\leq 0.2\text{mm}$				
Bulge (undulation included)	The ITO film plumped below 0.40mm, it's ok. 				
Newton Ring	Newton Ring area $> 1/3$ TP area NG Newton Ring area $\leq 1/3$ TP area OK		 1 规律性  2 非规律性  似牛顿环		

		TP corner broken X : length Y : width Z : height	<table><tr><td>X</td><td>Y</td><td>Z</td></tr><tr><td>$X \leq 3\text{mm}$</td><td>$Y \leq 3\text{mm}$</td><td>$Z < \text{COVER thickness}$</td></tr></table> * *Circuitry broken is not allowed.	X	Y	Z	$X \leq 3\text{mm}$	$Y \leq 3\text{mm}$	$Z < \text{COVER thickness}$	
X	Y	Z								
$X \leq 3\text{mm}$	$Y \leq 3\text{mm}$	$Z < \text{COVER thickness}$								
		TP edge broken X : length Y : width Z : height	<table><tr><td>X</td><td>Y</td><td>Z</td></tr><tr><td>$X \leq 4\text{mm}$</td><td>$Y \leq 2\text{mm}$</td><td>$Z < \text{COVER thickness}$</td></tr></table> * Circuitry broken is not allowed.	X	Y	Z	$X \leq 4\text{mm}$	$Y \leq 2\text{mm}$	$Z < \text{COVER thickness}$	
X	Y	Z								
$X \leq 4\text{mm}$	$Y \leq 2\text{mm}$	$Z < \text{COVER thickness}$								

Criteria (functional items)

Number	Items	Criteria (mm)
1	No display	Not allowed
2	Missing segment	Not allowed
3	Short	Not allowed
4	Backlight no lighting	Not allowed
5	TP no function	Not allowed

8. Reliability Test Result

Item	Condition	Inspection after test
High Temperature Operating	70°C, 96H	Inspection after 2~4hours storage at room temperature, the sample shall be free from defects: 1. Air bubble in the LCD; 2. Non-display; 3. Missing segments/line; 4. Glass crack; 5. Current IDD is twice higher than initial value.
Low Temperature Operating	-20°C, 96HR	
High Temperature Storage	80°C, 96HR	
Low Temperature Storage	-30°C, 96HR	
High Temperature & High Humidity Operating	+60°C, 90% RH ,96 hours.	
Thermal Shock (Non-operation)	-30°C, 30 min ↔ +80°C, 30 min, Change time: 5min 20CYC.	
ESD test	C=150pF, R=330, 5points/panel Air: ±8KV, 5times; Contact: ±6KV, 5 times; (Environment: 15°C~35°C, 30%~60%).	
Vibration (Non-operation)	Frequency range: 10~55Hz, Stroke: 1.5mm Sweep: 10Hz~55Hz~10Hz 2 hours for each direction of X.Y.Z. (6 hours for total) (Package condition).	
Box Drop Test	1 Corner 3 Edges 6 faces, 80cm (MEDIUM BOX)	

Remark:

1. The test samples should be applied to only one test item.
2. Sample size for each test item is 5~10pcs.
3. For Damp Proof Test, Pure water (Resistance > 10MΩ) should be used.
4. In case of malfunction defect caused by ESD damage, if it would be recovered to normal state after resetting, it would be judged as a good part.
5. Failure Judgment Criterion: Basic Specification, Electrical Characteristic, Mechanical Characteristic, Optical Characteristic.

9. Cautions and Handling Precautions

9.1 Handling and Operating the Module

- (1) When the module is assembled, it should be attached to the system firmly.
Do not warp or twist the module during assembly work.
- (2) Protect the module from physical shock or any force. In addition to damage, this may cause improper operation or damage to the module and back-light unit.
- (3) Note that polarizer is very fragile and could be easily damaged. Do not press or scratch the surface.
- (4) Do not allow drops of water or chemicals to remain on the display surface.
If you have the droplets for a long time, staining and discoloration may occur.
- (5) If the surface of the polarizer is dirty, clean it using some absorbent cotton or soft cloth.
- (6) The desirable cleaners are water, IPA (Isopropyl Alcohol) or Hexane.
Do not use ketene type materials (ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.
- (7) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contact with hands, legs, or clothes, it must be washed away thoroughly with soap.
- (8) Protect the module from static; it may cause damage to the CMOS ICs.
- (9) Use finger-stalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (10) Do not disassemble the module.
- (11) Protection film for polarizer on the module shall be slowly peeled off just before use so that the electrostatic charge can be minimized.
- (12) Pins of I/F connector shall not be touched directly with bare hands.
- (13) Do not connect, disconnect the module in the "Power ON" condition.
- (14) Power supply should always be turned on/off by the item 6.1 Power On Sequence & 6.2 Power Off Sequence

9.2 Storage and Transportation.

- (1) Do not leave the panel in high temperature, and high humidity for a long time.
It is highly recommended to store the module with temperature from 0 to 35 °C and relative humidity of less than 70%
- (2) Do not store the TFT-LCD module in direct sunlight.
- (3) The module shall be stored in a dark place. When storing the modules for a long time, be sure to adopt effective measures for protecting the modules from strong ultraviolet radiation, sunlight, or fluorescent light.
- (4) It is recommended that the modules should be stored under a condition where no condensation is allowed. Formation of dewdrops may cause an abnormal operation or a failure of the module.
In particular, the greatest possible care should be taken to prevent any module from being operated where condensation has occurred inside.
- (5) This panel has its circuitry FPC on the bottom side and should be handled carefully in order not to be stressed.

Part. No	KD035VGFIA111	REV	V1.0	Page 26 of 27
常备库存 Stock For Sale	长期供货 Long Time supply	支持小量 NO MOQ	品种齐全 In Full Range	

10. Packing

-----TBD-----

Part. No	KD035VGFIGA111	REV	V1.0	Page 27 of 27
常 备 库 存 Stock For Sale	长 期 供 货 Long Time supply	支持小量 NO MOQ	品 种 齐 全 In Full Range	