

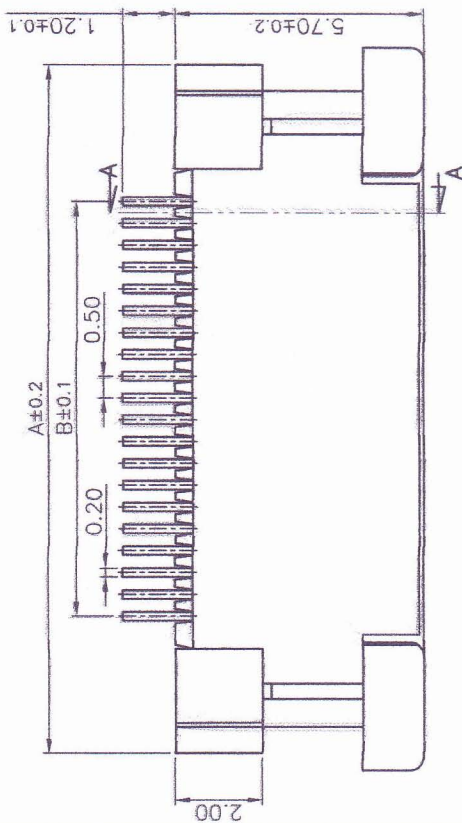
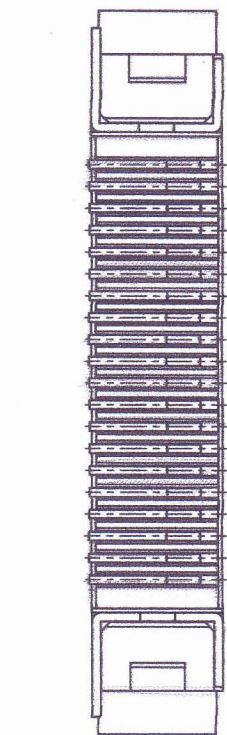



SECTION A-A
Upper Contact Side.

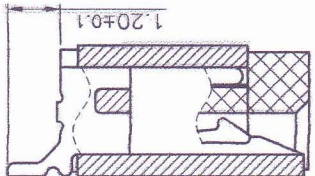

SECTION A-A
Bottom Contact Side

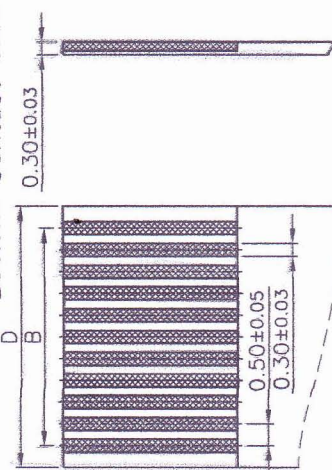

F.P.C DIMENSION(REF.)

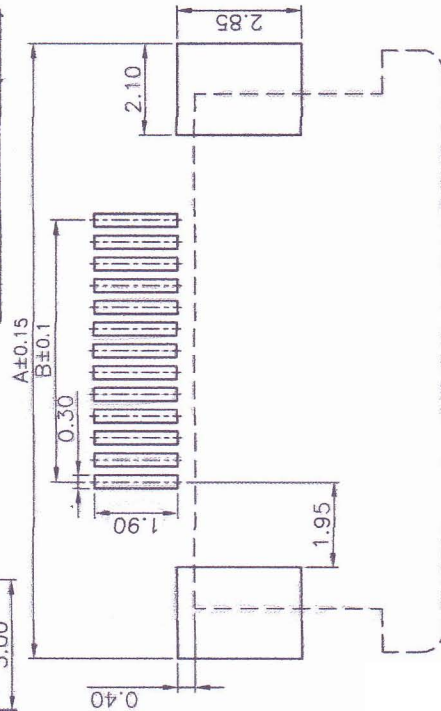

- NOTES:
1. HOUSING MATERIAL: HEAT RESISTANT PLASTIC UL94 V-0.
 2. ACTUATOR MATERIAL: HEAT RESISTANT PLASTIC UL94 V-0.
 3. TERMINAL MATERIAL: PHOSPHOR BRONZE.
 4. 2-1. PLATED WITH BRIGHT TIN(100%) 100u"~200u"
 5. 2-2. PLATED WITH MATTE TIN(100%) 100u"~200u"
 6. 2-3. PLATED WITH GOLD MORE THAN 1u.
 7. FITTING NAIL MATERIAL: Phosphor Bronze
 8. 3-1. PLATED WITH BRIGHT TIN(100%) 100u"~200u"
 9. 3-2. PLATED WITH MATTE TIN(100%) 100u"~200u"
 10. PARTS NO: 10100X-X0XXX0

- 1: 管装
2: 卷装
3: 袋装
4: 其他
- 8: 下接
9: 上接
- 1: 亮锡
2: 亮锡
3: 镀金1U
4: 镀金2U
5: 镀金3U

P数	DIM=A	DIM=B	DIM=C	DIM=D
60	35.90	29.50	36.60	30.55
59	35.40	29.00	36.10	30.05
58	34.90	28.50	35.60	29.55
57	34.40	28.00	35.10	29.05
56	33.90	27.50	34.60	28.55
55	33.40	27.00	34.10	28.05
54	32.90	26.50	33.60	27.55
53	32.40	26.00	33.10	27.05
52	31.90	25.50	32.60	26.55
51	31.40	25.00	32.10	26.05
50	30.90	24.50	31.60	25.55
49	30.40	24.00	31.10	25.05
48	29.90	23.50	30.60	24.55
47	29.40	23.00	30.10	24.05
46	28.90	22.50	29.60	23.55
45	28.40	22.00	29.10	23.05
44	27.90	21.50	28.60	22.55
43	27.40	21.00	28.10	22.05
42	26.90	20.50	27.60	21.55
41	26.40	20.00	27.10	21.05
40	25.90	19.50	26.60	20.55
39	25.40	19.00	26.10	20.05
38	24.90	18.50	25.60	19.55
37	24.40	18.00	25.10	19.05
36	23.90	17.50	24.60	18.55
35	23.40	17.00	24.10	18.05
34	22.90	16.50	23.60	17.55
33	22.40	16.00	23.10	17.05
32	21.90	15.50	22.60	16.55
31	21.40	15.00	22.10	16.05
30	20.90	14.50	21.60	15.55


客户图

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:
X.X ±0.1
X.XX ±0.05
X.XXX ±0.03
ANG. ±0'30"


APPROVED: 陈天舒
CHECKED: 张运兴
DATE: 2012-05-22
DATE: 2012-05-22

COMPUTER NO: 10100X-X0XXX0
NAME: FPC0.5-5代H3.0拉拔式成品

UNIT: MM
SCALE: 6:1
REV: A

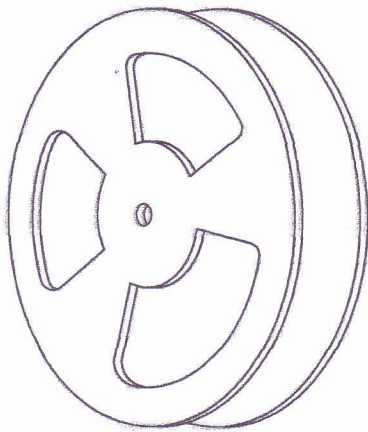

User Direction of Unreeling

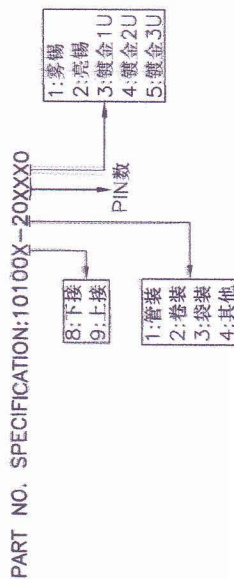

30	22.70	16.20	2.85	14.25	32
31	23.20	16.70		20.25	44
32	23.70	17.20		20.25	44
33	24.20	17.70		20.25	44
34	24.70	18.20		20.25	44
35	25.20	18.70		20.25	44
36	25.70	19.20		20.25	44
37	26.20	19.70		20.25	44
38	26.70	20.20		20.25	44
39	27.20	20.70		20.25	44
40	27.70	21.20	6.50	20.25	44
41	28.20	21.70		20.25	44
42	28.70	22.20		20.25	44
43	29.20	22.70		20.25	44
44	29.70	23.20		20.25	44
45	30.20	23.70		20.25	44
46	30.70	24.20		20.25	44
47	31.20	24.70		20.25	44
48	31.70	25.20		20.25	44
49	32.20	25.70	8.00	20.25	44
50	32.70	26.20		20.25	44
51	33.20	26.70		26.25	56
52	33.70	27.20		26.25	56
53	34.20	27.70		26.25	56
54	34.70	28.20		26.25	56
55	35.20	28.70		26.25	56
56	35.70	29.20		26.25	56
57	36.20	29.70		26.25	56
58	36.70	30.20	1500PCS /卷	26.25	56
59	37.20	30.70		26.25	56
60	37.70	31.20		26.25	56

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	X. X. X. X. X. X. X. XXX		±0.1 ±0.05	 UNIT MM	6	7	8	9
	ANG.	±0.30'						
包装图 APPROVED:  DATE: 2012-8-20 CHECKED: 陈天舒 DATE: 2011-10-11 DRAWN: 张运兴 DATE: 2011-10-11				COMPUTER NO 10100X-20XXXX NAME FPC0.5-5代H3.0拉拔式卷装图	SIZE A4	SCALE 3:4	REV A	